


MFB-135
MFB-180
MFB-220
MFB-270

MFB-135-C
MFB-180-C
MFB-220-C
MFB-270-C

MFB-135-CC
MFB-180-CC
MFB-220-CC
MFB-270-CC

| mod. | rango range | largo length (mm) | alto height (mm) | fondo depth (mm) | potencia frig. frig. power (W) | consumo consumption (W) | capacidad capacity (L) | estantes por puerta shelves by door | pares de guías por puerta sets of slides by door | tensión monofásica single phase voltage | refrigerante coolant |
|-----------|-------------|-------------------|------------------|------------------|--------------------------------|-------------------------|------------------------|-------------------------------------|--|---|----------------------|
| MFB-135 | -2°C+8°C | 1345 | 600 | 700 | 300 | 330 | 170 | 1 | 1 | 230 V - 50 Hz | R-134a |
| MFB-180 | -2°C+8°C | 1795 | 600 | 700 | 300 | 350 | 285 | 1 | 1 | 230 V - 50 Hz | R-134a |
| MFB-220 | -2°C+8°C | 2200 | 600 | 700 | 590 | 480 | 405 | 1 | 1 | 230 V - 50 Hz | R-134a |
| MFB-270 | -2°C+8°C | 2695 | 600 | 700 | 590 | 480 | 505 | 1 | 1 | 230 V - 50 Hz | R-134a |
| MFB-135-C | -2°C+8°C | 1345 | 600 | 700 | 300 | 330 | | 1 | 1 | 230 V - 50 Hz | R-134a |
| MFB-180-C | -2°C+8°C | 1795 | 600 | 700 | 300 | 350 | | 1 | 1 | 230 V - 50 Hz | R-134a |
| MFB-220-C | -2°C+8°C | 2200 | 600 | 700 | 590 | 480 | | 1 | 1 | 230 V - 50 Hz | R-134a |
| MFB-270-C | -2°C+8°C | 2695 | 600 | 700 | 590 | 480 | | 1 | 1 | 230 V - 50 Hz | R-134a |

Características técnicas y constructivas sujetas a variación sin previo aviso.

We reserve the right to change specifications without prior notice.

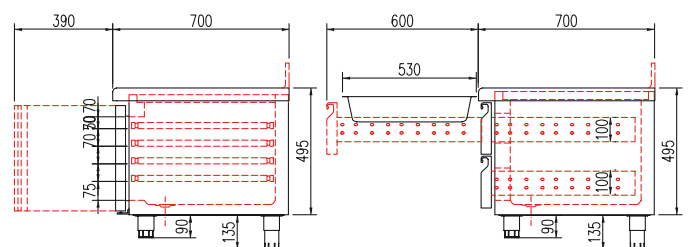
- **MFB** dotación de puertas
- **MFB-C** dotación de cajoneras dobles + una puerta
- **MFB-CC** dotación de cajoneras dobles + evaporadores centrales
- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Cajoneras refrigeradas inox desmontables sobre guías inox telescópicas, sistema auto-cierre de serie
- Encimera de acero inox AISI-304 con frente curvo (opcional con peto sanitario 100 mm)
- Estantes interiores GN 1/1 de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 90 - 125 mm
- Unidad condensadora ventilada y extraíble
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 38°C ambiente

- **MFB** doors as standard
- **MFB-C** double drawers sets + one door as standard
- **MFB-CC** double drawers sets + evaporators between drawers
- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Stainless steel drawers with telescopic stainless steel slides for complete opening, soft-closing system as standard
- AISI-304 stainless steel worktop, with rounded front (optional with 100 mm sanitary upstand)
- GN 1/1 shelves made of plasticized steel wire, height adjustable
- AISI-304 adjustable legs, 90 to 125 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature 38°C ambient

REFRIGERATED COUNTERS • MESAS REFRIGERADAS

Opciones - Options

| | |
|------------------------------|---------------------------|
| parrilla adicional GN 1/1 | GN 1/1 extra shelf |
| set adicional guías GN 1/1 | GN 1/1 slides extra set |
| cerradura puerta inox | solid door lock |
| motor lado izquierdo | left side engine |
| encimera con peto | worktop with upstand |
| set 4 ruedas | 4 castors set |
| set 6 ruedas | 6 castors set |
| registrador de alarmas HACCP | HACCP alarm recorder |
| respaldo inox | stainless steel rear side |
| tropicalizado 43°C | tropicalized to 43°C |
| 230v 60Hz / 115v 60Hz | 230v 60Hz / 115v 60Hz |


MFB
MFB-C

Mesa fría GN 2/1, refrigeración BAJO COCINA
GN 1/1 chiller counter UNDER BROILER

1



all photos must be considered as a reference - fotografías no contractuales

600 mm



MFB-180-CC



GN 1/1 - 100

puerta
door

MFB-220-C

