



MFEI70-180-1/6

MFEI70-225-1/6

MFEI70-270-1/6

Cubetas GN y perfiles divisorios NO incluidos en el precio, ver página 416
 GN containers and dividers NOT included in price, see page 416

mod.	rango range	largo length (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	pares de guías sets of slides	huecos GN 1/6 capacity GN 1/6	tensión monofásica single phase voltage	refrigerante coolant
MFEI70-180	0°C+8°C	1795	700	500	615	450	3	3	8	230 V - 50 Hz	R-134a
MFEI70-225	0°C+8°C	2245	700	750	790	635	4	4	12	230 V - 50 Hz	R-134a
MFEI70-270	0°C+8°C	2695	700	875	925	1050	5	5	14	230 V - 50 Hz	R-134a

FAST & COOL FOOD

Características técnicas y constructivas sujetas a variación sin previo aviso.


We reserve the right to change specifications without prior notice.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Encimera inox con expositor de ingredientes integrado y cubierta inox abatible
- Expositor ingredientes GN 1/6-150
- Estantes interiores GN 1/1 de alambre en acero plastificado, sobre guías de acero inox regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Unidad condensadora ventilada y extraíble
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- AISI-304 stainless steel worktop, raised topping well with hinged lid
- GN 1/4-150 topping unit
- GN 1/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature, 32°C ambient


Opciones - Options

cerradura puerta inox	solid door lock
motor lado izquierdo	left side engine
set 4 ruedas	4 castors set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
encimera de granito	granite worktop
respaldo inox	stainless steel rear side
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz



Encimeras, alojamientos para cubetas y cubiertas, se pueden fabricar a medida.
 Worktops, container fits and covers, can be customized.

all photos must be considered as a reference - fotografías no contractuales

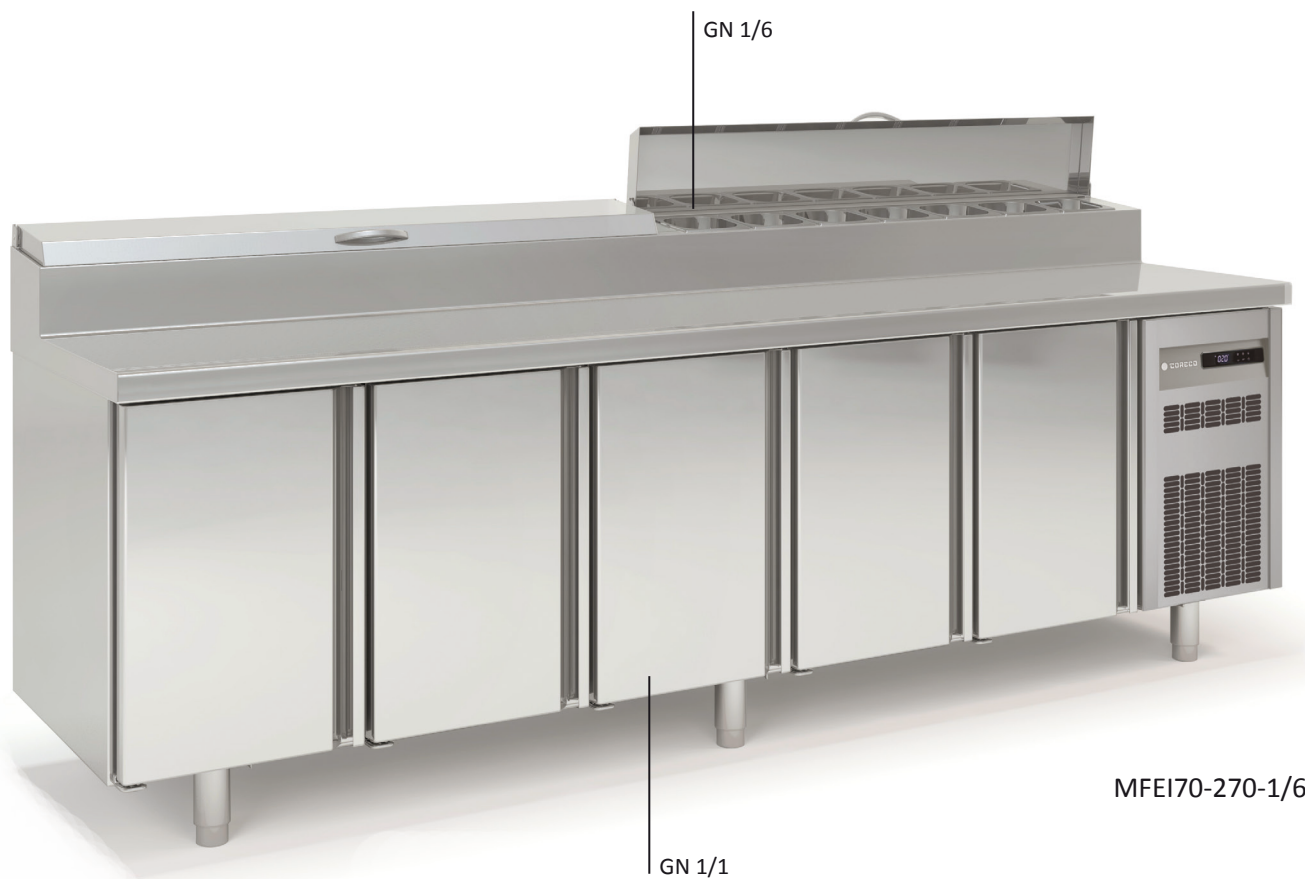

MFEI70-270-1/6

MFEI70-180-1/6
8xGN1/6



MFEI70-225-1/6
12xGN1/6



MFEI70-270-1/6
14xGN1/6



evaporador central
double fan evaporator

