




SD-27	
SDN-27	

SD-48	
SDN-48	

SD-60	
SDN-60	

SD-72	
-------	--

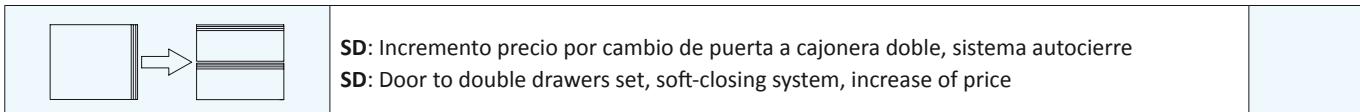

mod.	rango range	largo length (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	tensión monofásica single phase voltage	refrigerante coolant
SD-27	0°C+8°C	701	770	300	310	210	2	230 V - 50 Hz	R-134a
SD-48	0°C+8°C	1228	770	356	320	390	4	230 V - 50 Hz	R-134a
SD-60	0°C+8°C	1532	770	480	470	500	4	230 V - 50 Hz	R-134a
SD-72	0°C+8°C	1837	770	565	520	600	6	230 V - 50 Hz	R-134a
SDN-27	-20°C-15°C	701	770	xxx	xxx	210	2	230 V - 50 Hz	R-404A
SDN-48	-20°C-15°C	1228	770	xxx	xxx	390	4	230 V - 50 Hz	R-404A
SDN-60	-20°C-15°C	1532	770	xxx	xxx	500	4	230 V - 50 Hz	R-404A

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior e interior en acero, respaldo en chapa galvanizada
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Encimera inox AISI-304
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Ruedas de serie (2 con freno + 2 sin freno)
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarte
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero GWP y cero efecto ODP
- Control digital de temperatura, descartes optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 38°C ambiente

We reserve the right to change specifications without prior notice.


- Stainless steel interior and exterior, rear side galvanized panel
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- AISI 304 stainless steel worktop
- Shelves made of plasticized steel wire, height adjustable
- Castors as standard (2 with brakes + 2 without)
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero GWP and zero ODP effect
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature, 38°C ambient

### Opciones - Options

encimera con peto	splashback worktop
set 4 patas	4 legs set
set 6 patas	6 legs set
respaldo inox	stainless steel rear side
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
tropicalizado 43°	tropicalized to 43°



SD-72  
con cajoneras opcionales  
with optional drawers sets

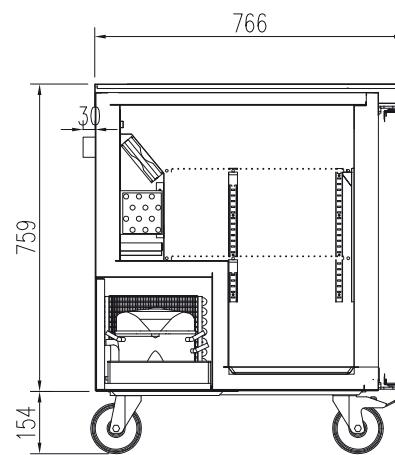

*all photos must be considered as a reference - fotografías no contractuales*

