


SPRING

SPRING Un tavolo ad hoc per ogni professionista della ristorazione!

Ottimizzare lo spazio con strumenti pensati per **razionalizzare spese di gestione e costi energetici**.

Afinox si impegna a promuovere questa filosofia in ogni suo servizio. E' da questa idea che prendono forma i **tavoli SPRING, strumenti versatili e declinabili con facilità** per una infinita serie di esigenze. Diverse profondità e capacità di stoccaggio, numerosi optional e possibilità di personalizzazione, superfici da lavoro comode e facilmente sfruttabili in ogni laboratorio. SPRING, molto più di quello che ti aspetti da un semplice tavolo refrigerato!

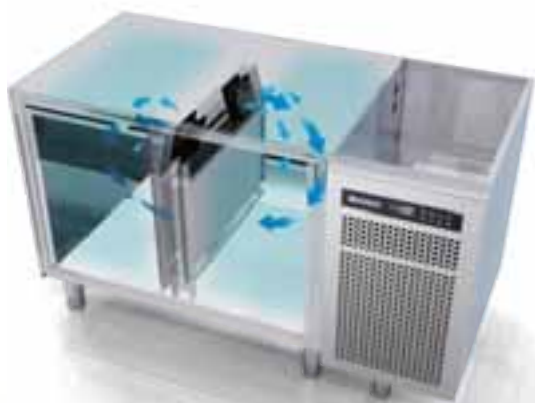

3D Cooling system

L'unico sistema che garantisce una temperatura corretta ed uniforme in tutti i vani.

3D Cooling system

The only system that guarantees a correct and uniform temperature in the whole counter.




SPRING...an ad hoc counter for each Professional Catering Operator!

Optimizing the working space with furniture designed to **rationalize the operating and the energy costs**.

*This is the Afinox commitment, a philosophy which is carried out in each one of its services. From this starting point the **SPRING counters** idea originates: a **versatile tool**, declinable with ease **for an infinite range of needs**. Different depths and storage capacities, numerous options and possibilities of customization, comfortable work surfaces, exploitable in any laboratory. SPRING, much more than what you expect from a refrigerated counter!*



Fermo porta a 90° con maniglia orizzontale e guarnizioni ad incastro
90° stop self-closing doors with horizontal handle and snap out door gasket



Isolamento spessore 60 mm (senza CFC e HCFC)
60 mm insulation thickness (CFC & HCFC free)





SPRING

Dotazioni standard - Standard features

SPRING 700



Vano GN1/1 (1 griglia plastificata su coppie guide inox)
GN1/1 room (1 plastic coated shelf on s/s runners)



Profondità utile dei cassetti GN1/1 (1/3=cm 12,5, 1/2=cm 23,4, 2/3=cm 34,2)
Usable depth of GN 1/1 drawers (1/3=cm 12,5, 1/2=cm 23,4, 2/3=cm 34,2)

SPRING 700 BIG



Vano GN1/1 (1 griglia plastificata su coppie guide inox)
GN1/1 room (1 plastic coated shelf on s/s runners)



Profondità utile dei cassetti GN1/1 (1/3=cm 15,5, 1/2=cm 25,1, 2/3=cm 37)
Usable depth of GN 1/1 drawers (1/3=cm 15,5, 1/2=cm 25,1, 2/3=cm 37)

SPRING 800



Vano refrigerato EN400x600 (3 coppie di guide inox per teglie EN600x400; teglie non incluse)
EN400x600 refrigerated room (3 s/s pairs of runners for EN600x400 trays; trays are not included)

Dotazioni opzionali - Optional features



Filtro rimovibile
Removable filter



Sterilizzatore
Steril kit



Porta a vetro
Glass door



Led
Led



SPRING saladette... rallegra i tuoi piatti freddi!

Annoiato dalle solite insalate e piatti freddi?
Vorresti ridare nuova vita ai soliti ingredienti?
Afinox ti aiuta a trovare nuove idee, per spaziare con la fantasia e ravvivare le tue fresche insalate di verdure, antipasti e contorni.

Con SPRING saladette potrai sfruttare i vantaggi di una saladette ben organizzata e dal design moderno.

Con coperchio inox telescopico
With s/s telescopic lid



mod. C

SPRING saladette... *delight your cold dishes!*

*Are you bored from your usual salads and cold dishes?
Would you like to give new life to your ingredients?
Afinox helps you in finding new ideas to explore with the imagination and bring life back to your fresh vegetable salads, entrees and side dishes.*

With SPRING saladette you can take advantage of a well organized and modernly designed saladette.

Con cupola in vetro e antine plexi scorrevoli
With glass superstructure and plexiglass sliding doors



mod. V



Foro Gastronorm per
inserimento vaschette inox
Gastronorm hole for s/s pans



Antine rimovibili in plexiglas
di serie sul lato servizio
*Removable plexiglass sliding
doors on operator side*



Pannello di controllo per
modelli predisposti senza
gruppo
*Control panel for models
without unit*



SPRING PLUS R290



700

	Modello Model	Codice Code	Piano Worktop	Range °C Range °C
	SPRINGPLUS702TN	7ST72IP2VA001	piano dritto / straight worktop	-2/+7°C
	SPRINGPLUS702TN/A	7ST72IP2LA001	piano + alzatina / work top with splashback	-2/+7°C
	SPRINGPLUS702TN/S	7ST72IP2NA001	senza piano / without worktop	-2/+7°C
	SPRINGPLUS702BT	7ST72IB2VA001	piano dritto / straight worktop	-24° / -18°C
	SPRING702PLUSBT/A	7ST72IB2LA001	piano + alzatina / work top with splashback	-24° / -18°C
	SPRING702PLUSBT/S	7ST72IB2NA001	senza piano / without worktop	-24° / -18°C
	SPRINGPLUS703TN	7ST73IP2VA001	piano dritto / straight worktop	-2/+7°C
	SPRINGPLUS703TN/A	7ST73IP2LA001	piano + alzatina / work top with splashback	-2/+7°C
	SPRINGPLUS703TN/S	7ST73IP2NA001	senza piano / without worktop	-2/+7°C
	SPRINGPLUS703BT	7ST73IB2VA001	piano dritto / straight worktop	-24° / -18°C
	SPRINGPLUS703BT/A	7ST73IB2LA001	piano + alzatina / work top with splashback	-24° / -18°C
	SPRINGPLUS703BT/S	7ST73IB2NA001	senza piano / without worktop	-24° / -18°C
	SPRINGPLUS704TN	7ST74IP2VA001	piano dritto / straight worktop	-2/+7°C
	SPRINGPLUS704TN/A	7ST74IP2LA001	piano + alzatina / work top with splashback	-2/+7°C
	SPRINGPLUS704TN/S	7ST74IP2NA001	senza piano / without worktop	-2/+7°C
	SPRINGPLUS704BT	7ST74IB2VA001	piano dritto / straight worktop	-24° / -18°C
	SPRINGPLUS704BT/A	7ST74IB2LA001	piano + alzatina / work top with splashback	-24° / -18°C
	SPRINGPLUS704BT/S	7ST74IB2NA001	senza piano / without worktop	-24° / -18°C
		74768458-60	Coppia guide a "C" per griglie GN 1/1	
		74768000	Griglia plastificata GN 1/1	
		74768002	Griglia inox GN 1/1	
	CASS1/2		Sovrapprezzo per cassettera 2 cassetti 1/2	
	CASS1/3		Sovrapprezzo per cassettera 3 cassetti 1/3	
	CASS2/3		Sovrapprezzo per cassettera cassetti 1/3+2/3	
	KIT 4 RUOTE		Sovrapprezzo per 4 ruote	
	VERS220-60		Sovrapprezzo per Versione 220V/60Hz	

**** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

PER ALTRI OPTIONAL E ACCESSORI VEDI PG. 134/135

I gas fluorurati a effetto serra sono contenuti in apparecchiature ermeticamente sigillate.

Dati tecnici e caratteristiche soggetti a cambiamento senza preavviso.



Tavoli refrigerati ventilati per la ristorazione GN1/1, 2, 3, 4 porte GN1/1, in acciaio inox AISI 304, con gas refrigerante ecologico R290.

- Profondità 700 mm, isolamento 60mm
- TN (-2°C/+7°C) o BT (-24°C/-18°C)
- Controller elettronico con display digitale. Funzioni di overcooling e controllo umidità standard
- Gruppo incorporato
- Fermo porta a 90° e richiamo automatico
- Interni arrotondati, evaporatore rialzato e scarico integrato per una pulizia facilitata
- Sbrinamento ed evaporazione dell'acqua di condensa automatici
- Accessori interni di serie per porta: 1 griglia GN1/1 plastificata su coppia guide in acciaio

Optional:

filtro removibile, ozonizzatore, cassetti 1/2, 1/3, 2/3,

S/s AISI 304, 2, 3 or 4 doors GN 1/1 refrigerated counters, with ecofriendly R290 refrigerant.

- 700 mm depth, 60mm thick insulation
- TN (-2°C/+7°C) or BT (-24°C/-18°C)
- Electronic controller with digital temperature display. Overcooling and humidity control standard functions
- Incorporated unit
- 90° stop self-closing doors
- Inner bottom panel with rounded corners, raised evaporator and integrated water discharge pipe for easy cleaning
- Automatic systems for defrosting and evaporation of the condensation water
- Standard fitting per door: 1 GN1/1 plastic coated shelf on s/s runners

Optional:

removable filter, ozonizer, drawers 1/1, 1/3, 2/3,



CASS1/2



CASS1/3



CASS2/3



KIT 4 RUOTE



VERS 220-60



3D COOLING SYSTEM



	Gas / Gas		Dimensioni (mm) Dimensions (mm)	Assorbimento / Absorbed power		Vtaggio/Voltage V/Hz	Dimensioni imballo (mm) Packing dimensions (mm)	Peso Netto/Lordo (Kg) Net/Gross weight (kg)
	gr			Watt****	Ampere			
R290	120		1300x700x850	247	5.03	230/50	1360x760x930	110/125
R290	120		1300x700x950	247	5.03	230/50	1360x760x1030	110/125
R290	120		1300x700x810	247	5.03	230/50	1360x760x890	110/125
R290	140		1300x700x850	568	8.52	230/50	1360x760x930	130/145
R290	140		1300x700x950	568	8.52	230/50	1360x760x1030	130/145
R290	140		1300x700x810	568	8.52	230/50	1360x760x890	130/145
R290	120		1780x700x850	247	5.03	230/50	1840x760x930	120/135
R290	120		1780x700x950	247	5.03	230/50	1840x760x1030	120/135
R290	120		1780x700x810	247	5.03	230/50	1840x760x890	120/135
R290	140		1780x700x850	568	8.52	230/50	1840x760x930	140/155
R290	140		1780x700x950	568	8.52	230/50	1840x760x1030	140/155
R290	140		1780x700x810	568	8.52	230/50	1840x760x890	140/155
R290	120		2260x700x850	247	5.03	230/50	2320x760x930	130/145
R290	120		2260x700x950	247	5.03	230/50	2320x760x1030	130/145
R290	120		2260x700x810	247	5.03	230/50	2320x760x890	130/145
R290	140		2260x700x850	568	8.52	230/50	2320x760x930	150/165
R290	140		2260x700x950	568	8.52	230/50	2320x760x1030	150/165
R290	140		2260x700x810	568	8.52	230/50	2320x760x890	150/165

"C" pair of runners for GN 1/1 pans

Plastic coated GN 1/1 shelf

S/S GN 1/1 shelf

Price Increase for block of 2 x 1/2 drawers (per/for mod. TN e BT)

Price Increase for Block of 3 x 1/3 drawers (solo per/only for mod.TN)

Price Increase for block of 1/3+2/3 drawers (solo per/only for mod.TN)

Price Increase for 4 castors

Price Increase for Power supply 220V/60Hz

**** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

FOR OTHER OPTIONS & ACCESSORIES PLEASE SEE PP. 134/135

Fluorinated greenhouse refrigerant gases are contained in hermetically sealed equipment.

All specifications are subject to change without notice.



SPRING

702

	Modello <i>Model</i>	Codice <i>Code</i>	Piano <i>Worktop</i>	Unità Condensatrice <i>Condensing Unit</i>	
	SPRING702TN	7ST72IP4VA001	piano dritto / straight worktop	Si/Yes	
	SPRING702TN/A	7ST72IP4LA001	piano + alzatina / work top with splashback	Si/Yes	
	SPRING702TN/S	7ST72IP4NA001	senza piano / without worktop	Si/Yes	
	SPRING702BT	7ST72IB4VA001	piano dritto / straight worktop	Si/Yes	
	SPRING702BT/A	7ST72IB4LA001	piano + alzatina / work top with splashback	Si/Yes	
	SPRING702BT/S	7ST72IB4NA001	senza piano / without worktop	Si/Yes	
	SPRING702TN R**	7ST72RP4VA001	piano dritto / straight worktop	No	
	SPRING702TN/A R**	7ST72RP4LA001	piano + alzatina / work top with splashback	No	
	SPRING702TN/S R**	7ST72RP4NA001	senza piano / without worktop	No	
	UCTN1-T*	74861750	Unità Condensatrice R404a		
	SPRING702BT R**	7ST72RB4VA001	piano dritto / straight worktop	No	
	SPRING702BT/A R**	7ST72RB4LA001	piano + alzatina / work top with splashback	No	
	SPRING702BT/S R**	7ST72RB4NA001	senza piano / without worktop	No	
	UCBT1-T*	74861760	Unità Condensatrice R404a		
	EVAP-T		Sovrapprezzo per vaschetta evapora condensa per tavoli senza gruppo R		
		74768458-60	Coppia guide a "C" per griglie GN 1/1		
		74768000	Griglia plastificata GN 1/1		
		74768002	Griglia inox GN 1/1		
	CASS1/2		Sovrapprezzo per cassetiera 2 cassetti 1/2		
	CASS1/3		Sovrapprezzo per cassetiera 3 cassetti 1/3		
	CASS2/3		Sovrapprezzo per cassetiera cassetti 1/3+2/3		
	KIT 4 RUOTE		Sovrapprezzo per 4 ruote		
	VERS220-60		Sovrapprezzo per Versione 220V/60Hz		

* Distanza massima 5 mt ** R = Versione remota **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

PER ALTRI OPTIONAL E ACCESSORI VEDI PG. 134/135

I gas fluorurati a effetto serra sono contenuti in apparecchiature ermeticamente sigillate.

Dati tecnici e caratteristiche soggetti a cambiamento senza preavviso.



Tavoli refrigerati ventilati per la ristorazione GN1/1, 2 porte GN1/1, in acciaio inox AISI 304, con gas refrigerante R404a (GWP3780).

- Profondità 700 mm, isolamento 60mm
- TN (-2°C/+7°C) o BT (-24°C/-18°C)
- Controller elettronico con display digitale. Funzioni di overcooling e controllo umidità standard
- Gruppo incorporato o versione remota
- Fermo porta a 90° e richiamo automatico
- Interni arrotondati, evaporatore rialzato e scarico integrato per una pulizia facilitata
- Sbrinamento ed evaporazione dell'acqua di condensa automatici (solo incorporati)
- Accessori interni di serie per porta: 1 griglia GN1/1 plastificata su coppia guide in acciaio

Optional:

filtro removibile, ozonizzatore, cassetti 1/2, 1/3, 2/3.

S/s AISI 304, 2 doors GN 1/1 refrigerated counters, with ecofriendly R404a refrigerant (GWP3780).

- 700 mm depth, 60mm thick insulation
- TN (-2°C/+7°C) or BT (-24°C/-18°C)
- Electronic controller with digital temperature display. Overcooling and humidity control standard functions
- Incorporated or remote unit
- 90° stop self-closing doors
- Inner bottom panel with rounded corners, raised evaporator and integrated water discharge pipe for easy cleaning
- Automatic systems for defrosting and evaporation of the condensation water (only models with built-in unit)
- Standard fitting per door: 1 GN1/1 plastic coated shelf on s/s runners

Optional:

removable filter, ozonizer, drawers 1/1, 1/3, 2/3.



CASS1/2



CASS1/3



CASS2/3



KIT 4 RUOTE



220 - 60Hz

VERS 220-60



Range °C Range °C	Gas / Gas	Gas gr	Dimensioni (mm) Dimensions (mm)	Assorbimento / Absorbed power		Votaggio/Voltage V/Hz	Dimensioni imballo (mm) Packing dimensions (mm)	Peso Netto/Lordo (Kg) Net/Gross weight (kg)
				Watt****	Ampere			
-2/+7°C	R404a	250	1300x700x850	275	5.22	230/50	1360x760x930	110/125
-2/+7°C	R404a	250	1300x700x950	275	5.22	230/50	1360x760x1030	110/125
-2/+7°C	R404a	250	1300x700x810	275	5.22	230/50	1360x760x890	110/125
-24° / -18°C	R404a	300	1300x700x850	634	9.15	230/50	1360x760x930	130/145
-24° / -18°C	R404a	300	1300x700x950	634	9.15	230/50	1360x760x1030	130/145
-24° / -18°C	R404a	300	1300x700x810	634	9.15	230/50	1360x760x890	130/145
-2/+7°C	R404a		1160x700x850	0	0	230/50	1220x760x930	87/102
-2/+7°C	R404a		1160x700x950	0	0	230/50	1220x760x1030	87/102
-2/+7°C	R404a		1160x700x810	0	0	230/50	1220x760x890	87/102

Condensing unit R404a

-24° / -18°C	R404a		1160x700x850	0	0	230/50	1220x760x930	87/102
-24° / -18°C	R404a		1160x700x950	0	0	230/50	1220x760x1030	87/102
-24° / -18°C	R404a		1160x700x810	0	0	230/50	1220x760x890	87/102

Condensing unit R404a

Price Increase for condensation water bowl for counters without condensing unit (R model)

"C" pair of runners for GN 1/1 pans

Plastic coated GN 1/1 shelf

S/S GN 1/1 shelf

Price Increase for block of 2 x 1/2 drawers (per/for mod. TN e BT)

Price Increase for Block of 3 x 1/3 drawers (solo per/only for mod.TN)

Price Increase for block of 1/3+2/3 drawers (solo per/only for mod.TN)

Price increase for 4 castors

Price Increase for Power supply 220V/60Hz

*Max distance 5 mt ** R = Remote Version **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

FOR OTHER OPTIONS & ACCESSORIES PLEASE SEE PP. 134/135

Fluorinated greenhouse refrigerant gases are contained in hermetically sealed equipment.

All specifications are subject to change without notice.



SPRING

703

	Modello <i>Model</i>	Codice <i>Code</i>	Piano <i>Worktop</i>	Unità Condensatrice <i>Condensing Unit</i>	
	SPRING703TN	7ST73IP4VA001	piano dritto / straight worktop	Si/Yes	
	SPRING703TN/A	7ST73IP4LA001	piano + alzatina / work top with splashback	Si/Yes	
	SPRING703TN/S	7ST73IP4NA001	senza piano / without worktop	Si/Yes	
	SPRING703BT	7ST73IB4VA001	piano dritto / straight worktop	Si/Yes	
	SPRING703BT/A	7ST73IB4LA001	piano + alzatina / work top with splashback	Si/Yes	
	SPRING703BT/S	7ST73IB4NA001	senza piano / without worktop	Si/Yes	
	SPRING703TN R	7ST73RP4VA001	piano dritto / straight worktop	No	
	SPRING703TN/A R**	7ST73RP4LA001	piano + alzatina / work top with splashback	No	
	SPRING703TN/S R**	7ST73RP4NA001	senza piano / without worktop	No	
	UCTN2-T*	74861752	Unità Condensatrice R404a		
	SPRING703BT R**	7ST73RB4VA001	piano dritto / straight worktop	No	
	SPRING703BT/A R**	7ST73RB4LA001	piano + alzatina / work top with splashback	No	
	SPRING703BT/S R**	7ST73RB4NA001	senza piano / without worktop	No	
	UCBT2- T*	74861762	Unità Condensatrice R404a		
	EVAP-T		Sovrapprezzo per vaschetta evapora condensa per tavoli senza gruppo R		
		74768458-60	Coppia guide a "C" per griglie GN 1/1		
		74768000	Griglia plastificata GN 1/1		
		74768002	Griglia inox GN 1/1		
	CASS1/2		Sovrapprezzo per cassetiera 2 cassetti 1/2		
	CASS1/3		Sovrapprezzo per cassetiera 3 cassetti 1/3		
	CASS2/3		Sovrapprezzo per cassetiera cassetti 1/3+2/3		
	KIT 4 RUOTE		Sovrapprezzo per 4 ruote		
	VERS220-60		Sovrapprezzo per Versione 220V/60Hz		

* Distanza massima 5 mt ** R = Versione remota **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

PER ALTRI OPTIONAL E ACCESSORI VEDI PG. 134/135

I gas fluorurati a effetto serra sono contenuti in apparecchiature ermeticamente sigillate.

Dati tecnici e caratteristiche soggetti a cambiamento senza preavviso.



Tavoli refrigerati ventilati per la ristorazione GN1/1, 3 porte GN1/1, in acciaio inox AISI 304, con gas refrigerante R404a (GWP3780).

- Profondità 700 mm, isolamento 60mm
- TN (-2°C/+7°C) o BT (-24°C/-18°C)
- Controller elettronico con display digitale. Funzioni di overcooling e controllo umidità standard
- Gruppo incorporato o versione remota
- Fermo porta a 90° e richiamo automatico
- Interni arrotondati, evaporatore rialzato e scarico integrato per una pulizia facilitata
- Sbrinamento ed evaporazione dell'acqua di condensa automatici (solo incorporati)
- Accessori interni di serie per porta: 1 griglia GN1/1 plastificata su coppia guide in acciaio

Optional:

filtro removibile, ozonizzatore, cassetti 1/2, 1/3, 2/3.

S/s AISI 304, 3 doors GN 1/1 refrigerated counters, with ecofriendly R404a refrigerant (GWP3780).

- 700 mm depth, 60mm thick insulation
- TN (-2°C/+7°C) or BT (-24°C/-18°C)
- Electronic controller with digital temperature display. Overcooling and humidity control standard functions
- Incorporated or remote unit
- 90° stop self-closing doors
- Inner bottom panel with rounded corners, raised evaporator and integrated water discharge pipe for easy cleaning
- Automatic systems for defrosting and evaporation of the condensation water (only models with built-in unit)
- Standard fitting per door: 1 GN1/1 plastic coated shelf on s/s runners

Optional:

removable filter, ozonizer, drawers 1/1, 1/3, 2/3.



CASS1/2



CASS1/3



CASS2/3



KIT 4 RUOTE



VERS 220-60



Range °C Range °C	Gas / Gas	Gas gr	Dimensioni (mm) Dimensions (mm)	Assorbimento / Absorbed power		Vollaggio/Voltage V/Hz	Dimensioni imballo (mm) Packing dimensions (mm)	Peso Netto/Lordo (Kg) Net/Gross weight (kg)
				Watt****	Ampere			
-2/+7°C	R404a	250	1780x700x850	275	5.22	230/50	1840x760x930	120/135
-2/+7°C	R404a	250	1780x700x950	275	5.22	230/50	1840x760x1030	120/135
-2/+7°C	R404a	250	1780x700x810	275	5.22	230/50	1840x760x890	120/135
-24° / -18°C	R404a	300	1780x700x850	634	9.15	230/50	1840x760x930	140/155
-24° / -18°C	R404a	300	1780x700x950	634	9.15	230/50	1840x760x1030	140/155
-24° / -18°C	R404a	300	1780x700x810	634	9.15	230/50	1840x760x890	140/155
-2/+7°C	R404a		1640x700x850	0	0	230/50	1700x760x930	97/112
-2/+7°C	R404a		1640x700x950	0	0	230/50	1700x760x1030	97/112
-2/+7°C	R404a		1640x700x810	0	0	230/50	1700x760x890	97/112

Condensing unit R404a

-24° / -18°C	R404a		1640x700x850	0	0	230/50	1700x760x930	97/112
-24° / -18°C	R404a		1640x700x950	0	0	230/50	1700x760x1030	97/112
-24° / -18°C	R404a		1640x700x810	0	0	230/50	1700x760x890	97/112

Condensing unit R404a

Price Increase for condensation water bowl for counters without condensing unit (R model)

"C" pair of runners for GN 1/1 pans

Plastic coated GN 1/1 shelf

S/S GN 1/1 shelf

Price Increase for block of 2 x 1/2 drawers (per/for mod. TN e BT)

Price Increase for Block of 3 x 1/3 drawers (solo per/only for mod.TN)

Price Increase for block of 1/3+2/3 drawers (solo per/only for mod.TN)

Price increase for 4 castors

Price Increase for Power supply 220V/60Hz

*Max distance 5 mt ** R = Remote Version **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

FOR OTHER OPTIONS & ACCESSORIES PLEASE SEE PP. 134/135

Fluorinated greenhouse refrigerant gases are contained in hermetically sealed equipment.

All specifications are subject to change without notice.



SPRING

704

	Modello <i>Model</i>	Codice <i>Code</i>	Piano <i>Worktop</i>	Unità Condensatrice <i>Condensing Unit</i>	
	SPRING704TN	7ST74IP4VA001	piano dritto / straight worktop	Si/Yes	
	SPRING704TN/A	7ST74IP4LA001	piano + alzatina / work top with splashback	Si/Yes	
	SPRING704TN/S	7ST74IP4NA001	senza piano / without worktop	Si/Yes	
	SPRING704BT	7ST74IB4VA001	piano dritto / straight worktop	Si/Yes	
	SPRING704BT/A	7ST74IB4LA001	piano + alzatina / work top with splashback	Si/Yes	
	SPRING704BT/S	7ST74IB4NA001	senza piano / without worktop	Si/Yes	
	SPRING704TN R**	7ST74RP4VA001	piano dritto / straight worktop	No	
	SPRING704TN/A R**	7ST74RP4LA001	piano + alzatina / work top with splashback	No	
	SPRING704TN/S R**	7ST74RP4NA001	senza piano / without worktop	No	
	UCTN3-T*	74861754	Unità Condensatrice R404a		
	SPRING704BT R**	7ST74RB4VA001	piano dritto / straight worktop	No	
	SPRING704BT/A R**	7ST74RB4LA001	piano + alzatina / work top with splashback	No	
	SPRING704BT/S R**	7ST74RB4NA001	senza piano / without worktop	No	
	UCBT3- T*	74861764	Unità Condensatrice R404a		
	EVAP-T		Sovrapprezzo per vaschetta evapora condensa per tavoli senza gruppo R		
		74768458-60	Coppia guide a "C" per griglie GN 1/1		
		74768000	Griglia plastificata GN 1/1		
		74768002	Griglia inox GN 1/1		
	CASS1/2		Sovrapprezzo per cassetiera 2 cassetti 1/2		
	CASS1/3		Sovrapprezzo per cassetiera 3 cassetti 1/3		
	CASS2/3		Sovrapprezzo per cassetiera cassetti 1/3+2/3		
	KIT 6 RUOTE		Sovrapprezzo per 6 ruote		
	VERS220-60		Sovrapprezzo per Versione 220V/60Hz		

* Distanza massima 5 mt ** R = Versione remota **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

PER ALTRI OPTIONAL E ACCESSORI VEDI PG. 134/135

I gas fluorurati a effetto serra sono contenuti in apparecchiature ermeticamente sigillate.

Dati tecnici e caratteristiche soggetti a cambiamento senza preavviso.



Tavoli refrigerati ventilati per la ristorazione GN1/1, 4 porte GN1/1, in acciaio inox AISI 304, con gas refrigerante R404a (GWP3780).

- Profondità 700 mm, isolamento 60mm
- TN (-2°C/+7°C) o BT (-24°C/-18°C)
- Controller elettronico con display digitale. Funzioni di overcooling e controllo umidità standard
- Gruppo incorporato o versione remota
- Fermo porta a 90° e richiamo automatico
- Interni arrotondati, evaporatore rialzato e scarico integrato per una pulizia facilitata
- Sbrinamento ed evaporazione dell'acqua di condensa automatici (solo incorporati)
- Accessori interni di serie per porta: 1 griglia GN1/1 plastificata su coppia guide in acciaio

Optional:

filtro removibile, ozonizzatore, cassetti 1/2, 1/3, 2/3.

S/s AISI 304, 4 doors GN 1/1 refrigerated counters, with ecofriendly R404a refrigerant (GWP3780).

- 700 mm depth, 60mm thick insulation
- TN (-2°C/+7°C) or BT (-24°C/-18°C)
- Electronic controller with digital temperature display. Overcooling and humidity control standard functions
- Incorporated or remote unit
- 90° stop self-closing doors
- Inner bottom panel with rounded corners, raised evaporator and integrated water discharge pipe for easy cleaning
- Automatic systems for defrosting and evaporation of the condensation water (only models with built-in unit)
- Standard fitting per door: 1 GN1/1 plastic coated shelf on s/s runners

Optional:

removable filter, ozonizer, drawers 1/1, 1/3, 2/3.



CASS1/2



CASS1/3



CASS2/3



KIT 4 RUOTE



VERS 220-60



Range °C Range °C	Gas / Gas	Gas gr	Dimensioni (mm) Dimensions (mm)	Assorbimento / Absorbed power		Voltaggio/Voltage V/Hz	Dimensioni imballo (mm) Packing dimensions (mm)	Peso Netto/Lordo (Kg) Net/Gross weight (kg)
				Watt****	Ampere			
-2/+7°C	R404a	250	2260x700x850	275	5.22	230/50	2320x760x930	130/145
-2/+7°C	R404a	250	2260x700x950	275	5.22	230/50	2320x760x1030	130/145
-2/+7°C	R404a	250	2260x700x810	275	5.22	230/50	2320x760x890	130/145
-24° / -18°C	R404a	300	2260x700x850	634	9.15	230/50	2320x760x930	150/165
-24° / -18°C	R404a	300	2260x700x950	634	9.15	230/50	2320x760x1030	150/165
-24° / -18°C	R404a	300	2260x700x810	634	9.15	230/50	2320x760x890	150/165
-2/+7°C	R404a		2120x700x850	0	0	230/50	2180x760x930	111/126
-2/+7°C	R404a		2120x700x950	0	0	230/50	2180x760x1030	111/126
-2/+7°C	R404a		2120x700x810	0	0	230/50	2180x760x890	111/126
Condensing unit R404a								
-24° / -18°C	R404a		2120x700x850	0	0	230/50	2180x760x930	111/126
-24° / -18°C	R404a		2120x700x950	0	0	230/50	2180x760x1030	111/126
-24° / -18°C	R404a		2120x700x810	0	0	230/50	2180x760x890	111/126

Condensing unit R404a

Price Increase for condensation water bowl for counters without condensing unit (R model)

"C" pair of runners for GN 1/1 pans

Plastic coated GN 1/1 shelf

S/S GN 1/1 shelf

Price Increase for block of 2 x 1/2 drawers (per/for mod. TN e BT)

Price Increase for Block of 3 x 1/3 drawers (solo per/only for mod.TN)

Price Increase for block of 1/3+2/3 drawers (solo per/only for mod.TN)

Price increase for 6 castors

Price Increase for Power supply 220V/60Hz

*Max distance 5 mt ** R = Remote Version **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

FOR OTHER OPTIONS & ACCESSORIES PLEASE SEE PP. 134/135

Fluorinated greenhouse refrigerant gases are contained in hermetically sealed equipment.

All specifications are subject to change without notice.



SPRING
PLUS R290



700Big

	Modello Model	Codice Code		Piano Worktop	Range °C Range °C	
	SPRINGPLUS702BIGTN	7SB72IP2VA001		piano dritto / straight worktop	-2/+7°C	
	SPRINGPLUS702BIGTN/A	7SB72IP2LA001		piano + alzatina / work top with splashback	-2/+7°C	
	SPRINGPLUS702BIGTN/S	7SB72IP2NA001		senza piano / without worktop	-2/+7°C	
	SPRINGPLUS702BIGBT	7SB72IB2VA001		piano dritto / straight worktop	-24° / -18°C	
	SPRINGPLUS702BIGBT/A	7SB72IB2LA001		piano + alzatina / work top with splashback	-24° / -18°C	
	SPRINGPLUS702BIGBT/S	7SB72IB2NA001		senza piano / without worktop	-24° / -18°C	
	SPRINGPLUS703BIGTN	7SB73IP2VA001		piano dritto / straight worktop	-2/+7°C	
	SPRINGPLUS703BIGTN/A	7SB73IP2LA001		piano + alzatina / work top with splashback	-2/+7°C	
	SPRINGPLUS703BIGTN/S	7SB73IP2NA001		senza piano / without worktop	-2/+7°C	
	SPRINGPLUS703BIGBT	7SB73IB2VA001		piano dritto / straight worktop	-24° / -18°C	
	SPRINGPLUS703BIGBT/A	7SB73IB2LA001		piano + alzatina / work top with splashback	-24° / -18°C	
	SPRINGPLUS703BIGBT/S	7SB73IB2NA001		senza piano / without worktop	-24° / -18°C	
	SPRINGPLUS704BIGTN	7SB74IP2VA001		piano dritto / straight worktop	-2/+7°C	
	SPRINGPLUS704BIGTN/A	7SB74IP2LA001		piano + alzatina / work top with splashback	-2/+7°C	
	SPRINGPLUS704BIGTN/S	7SB74IP2NA001		senza piano / without worktop	-2/+7°C	
	SPRINGPLUS704BIGBT	7SB74IB2VA001		piano dritto / straight worktop	-24° / -18°C	
	SPRINGPLUS704BIGBT/A	7SB74IB2LA001		piano + alzatina / work top with splashback	-24° / -18°C	
	SPRINGPLUS704BIGBT/S	7SB74IB2NA001		senza piano / without worktop	-24° / -18°C	
		74768458-60		Coppia guide a "C" per griglie GN 1/1		
		74768000		Griglia plastificata GN 1/1		
		74768002		Griglia inox GN 1/1		
	CASS1/2			Sovrapprezzo per cassetteria 2 cassetti 1/2		
	CASS1/3			Sovrapprezzo per cassetteria 3 cassetti 1/3		
	CASS2/3			Sovrapprezzo per cassetteria cassetti 1/3+2/3		
	KIT 4 RUOTE			Sovrapprezzo per 4 ruote		
	VERS220-60			Sovrapprezzo per Versione 220V/60Hz		

**** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

PER ALTRI OPTIONAL E ACCESSORI VEDI PG. 134/135

I gas fluorurati a effetto serra sono contenuti in apparecchiature ermeticamente sigillate.

Dati tecnici e caratteristiche soggetti a cambiamento senza preavviso.



Tavoli refrigerati ventilati per la ristorazione GN1/1, MAXI altezza maggiorata (h 900mm), 2, 3, 4 porte GN1/1, in acciaio inox AISI 304, con gas refrigerante ecologico R290.

- Profondità 700 mm, isolamento 60mm
- TN (-2°C/+7°C) o BT (-24°C/-18°C)
- Controller elettronico con display digitale. Funzioni di overcooling e controllo umidità standard
- Gruppo incorporato
- Fermo porta a 90° e richiamo automatico
- Interni arrotondati, evaporatore rialzato e scarico integrato per una pulizia facilitata
- Sbrinamento ed evaporazione dell'acqua di condensa automatici
- Accessori interni di serie per porta: 1 griglia GN1/1 plastificata su coppia guide in acciaio

Optional:

filtro removibile, ozonizzatore, cassetti 1/2, 1/3, 2/3.

S/s AISI 304, 2, 3 or 4 doors GN 1/1 refrigerated counters, MAXI height (h 900mm), with ecofriendly R290 refrigerant.

- 700 mm depth, 60mm thick insulation
- TN (-2°C/+7°C) or BT (-24°C/-18°C)
- Electronic controller with digital temperature display. Overcooling and humidity control standard functions
- Incorporated unit
- 90° stop self-closing doors
- Inner bottom panel with rounded corners, raised evaporator and integrated water discharge pipe for easy cleaning
- Automatic systems for defrosting and evaporation of the condensation water (only models with built-in unit)
- Standard fitting per door: 1 GN1/1 plastic coated shelf on s/s runners

Optional:

removable filter, ozonizer, drawers 1/1, 1/3, 2/3.



CASS1/2



CASS1/3



CASS2/3



KIT 4 RUOTE



VERS 220-60



	Gas / Gas		Dimensioni (mm) Dimensions (mm)	Assorbimento / Absorbed power		Votaggio/Voltage V/Hz	Dimensioni imballo (mm) Packing dimensions (mm)	Peso Netto/Lordo (Kg) Net/Gross weight (kg)
		gr		Watt****	Ampere			
	R290	120	1300x700x900	247	5.03	230/50	1360x760x980	110/125
	R290	120	1300x700x1000	247	5.03	230/50	1360x760x1080	110/125
	R290	120	1300x700x860	247	5.03	230/50	1360x760x940	110/125
	R290	140	1300x700x900	568	8.52	230/50	1360x760x980	140/155
	R290	140	1300x700x1000	568	8.52	230/50	1360x760x1080	140/155
	R290	140	1300x700x860	568	8.52	230/50	1360x760x940	140/155
	R290	120	1780x700x900	247	5.03	230/50	1840x760x980	120/135
	R290	120	1780x700x1000	247	5.03	230/50	1840x760x1080	120/135
	R290	120	1780x700x860	247	5.03	230/50	1840x760x940	120/135
	R290	140	1780x700x900	568	8.52	230/50	1840x760x980	150/165
	R290	140	1780x700x1000	568	8.52	230/50	1840x760x1080	150/165
	R290	140	1780x700x860	568	8.52	230/50	1840x760x940	150/165
	R290	120	2260x700x900	247	5.03	230/50	2320x760x980	130/145
	R290	120	2260x700x1000	247	5.03	230/50	2320x760x1080	130/145
	R290	120	2260x700x860	247	5.03	230/50	2320x760x940	130/145
	R290	140	2260x700x900	568	8.52	230/50	2320x760x980	160/175
	R290	140	2260x700x1000	568	8.52	230/50	2320x760x1080	160/175
	R290	140	2260x700x860	568	8.52	230/50	2320x760x940	160/175

"C" pair of runners for GN 1/1 pans

Plastic coated GN 1/1 shelf

S/S GN 1/1 shelf

Price Increase for block of 2 x 1/2 drawers (per/for mod. TN e BT)

Price Increase for Block of 3 x 1/3 drawers (solo per/only for mod.TN)

Price Increase for block of 1/3+2/3 drawers (solo per/only for mod.TN)

Price increase for 4 castors


Price Increase for Power supply 220V/60Hz

**** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

FOR OTHER OPTIONS & ACCESSORIES PLEASE SEE PP. 134/135

Fluorinated greenhouse refrigerant gases are contained in hermetically sealed equipment.

All specifications are subject to change without notice.

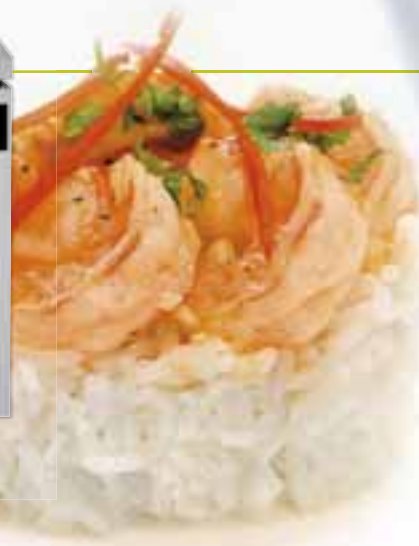

SPRING

702Big

	Modello <i>Model</i>	Codice <i>Code</i>		Piano <i>Worktop</i>	Unità Condensatrice <i>Condensing Unit</i>	
	SPRINGBIG702TN	7SB72IP4VA001		piano dritto / straight worktop	Si/Yes	
	SPRINGBIG702TN/A	7SB72IP4LA001		piano + alzatina / work top with splashback	Si/Yes	
	SPRINGBIG702TN/S	7SB72IP4NA001		senza piano / without worktop	Si/Yes	
	SPRINGBIG702BT	7SB72IB4VA001		piano dritto / straight worktop	Si/Yes	
	SPRINGBIG702BT/A	7SB72IB4LA001		piano + alzatina / work top with splashback	Si/Yes	
	SPRINGBIG702BT/S	7SB72IB4NA001		senza piano / without worktop	Si/Yes	
	SPRINGBIG702TN R**	7SB72RP4VA001		piano dritto / straight worktop	No	
	SPRINGBIG702TN/A R**	7SB72RP4LA001		piano + alzatina / work top with splashback	No	
	SPRINGBIG702TN/S R**	7SB72RP4NA001		senza piano / without worktop	No	
	UCTN1-T*	74861752		Unità Condensatrice R404a		
	SPRINGBIG702BT R**	7SB72RB4VA001		piano dritto / straight worktop	No	
	SPRINGBIG702BT/A R**	7SB72RB4LA001		piano + alzatina / work top with splashback	No	
	SPRINGBIG702BT/S R**	7SB72RB4NA001		senza piano / without worktop	No	
	UCBT1-T*	74861760		Unità Condensatrice R404a		
	EVAP-T			Sovrapprezzo per vaschetta evapora condensa per tavoli senza gruppo R		
		74768458-60		Coppia guide a "C" per griglie GN 1/1		
		74768000		Griglia plastificata GN 1/1		
		74768002		Griglia inox GN 1/1		
	CASS1/2			Sovrapprezzo per cassettiera 2 cassetti 1/2		
	CASS1/3			Sovrapprezzo per cassettiera 3 cassetti 1/3		
	CASS2/3			Sovrapprezzo per cassettiera cassetti 1/3+2/3		
	KIT 4 RUOTE			Sovrapprezzo per 4 ruote		
	VERS220-60			Sovrapprezzo per Versione 220V/60Hz		

* Distanza massima 5 mt ** R = Versione remota **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

PER ALTRI OPTIONAL E ACCESSORI VEDI PG. 134/135

I gas fluorurati a effetto serra sono contenuti in apparecchiature ermeticamente sigillate.

Dati tecnici e caratteristiche soggetti a cambiamento senza preavviso.



Tavoli refrigerati ventilati per la ristorazione GN1/1, MAXI altezza maggiorata (h 900mm), 2 porte GN1/1, in acciaio inox AISI 304, con gas refrigerante R404a (GWP3780).

- Profondità 700 mm, isolamento 60mm
- TN (-2°C/+7°C) o BT (-24°C/-18°C)
- Controller elettronico con display digitale. Funzioni di overcooling e controllo umidità standard
- Gruppo incorporato o versione remota
- Fermo porta a 90° e richiamo automatico
- Interni arrotondati, evaporatore rialzato e scarico integrato per una pulizia facilitata
- Sbrinamento ed evaporazione dell'acqua di condensa automatici (solo incorporati)
- Accessori interni di serie per porta: 1 griglia GN1/1 plastificata su coppia guide in acciaio

Optional:

filtro removibile, ozonizzatore, cassetti 1/2, 1/3, 2/3.

S/s AISI 304, 2 doors GN 1/1 refrigerated counters, MAXI height (h 900mm), with R404a refrigerant (GWP3780).

- 700 mm depth, 60mm thick insulation
- TN (-2°C/+7°C) or BT (-24°C/-18°C)
- Electronic controller with digital temperature display. Overcooling and humidity control standard functions
- Incorporated or remote unit
- 90° stop self-closing doors
- Inner bottom panel with rounded corners, raised evaporator and integrated water discharge pipe for easy cleaning
- Automatic systems for defrosting and evaporation of the condensation water (only models with built-in unit)
- Standard fitting per door: 1 GN1/1 plastic coated shelf on s/s runners

Optional:

removable filter, ozonizer, drawers 1/1, 1/3, 2/3.



CASS1/2



CASS1/3



CASS2/3



KIT 4 RUOTE



VERS 220-60



	Range °C Range °C	Gas / Gas		Dimensioni (mm) Dimensions (mm)	Assorbimento / Absorbed power		Vtaggio/Voltage V/Hz	Dimensioni imballo (mm) Packing dimensions (mm)	Peso Netto/Lordo (Kg) Net/Gross weight (kg)
		gr			Watt****	Ampere			
	-2/+7°C	R404a	250	1300x700x900	275	5.22	230/50	1360x760x980	110/125
	-2/+7°C	R404a	250	1300x700x1000	275	5.22	230/50	1360x760x1080	110/125
	-2/+7°C	R404a	250	1300x700x860	275	5.22	230/50	1360x760x940	110/125
	-24° / -18°C	R404a	300	1300x700x900	634	9.15	230/50	1360x760x980	140/155
	-24° / -18°C	R404a	300	1300x700x1000	634	9.15	230/50	1360x760x1080	140/155
	-24° / -18°C	R404a	300	1300x700x860	634	9.15	230/50	1360x760x940	140/155
	-2/+7°C	R404a		1160x700x900	0	0	230/50	1220x760x980	96/111
	-2/+7°C	R404a		1160x700x1000	0	0	230/50	1220x760x1080	96/111
	-2/+7°C	R404a		1160x700x860	0	0	230/50	1220x760x940	96/111
Condensing unit R404a									
	-24° / -18°C	R404a		1160x700x900	0	0	230/50	1220x760x980	96/111
	-24° / -18°C	R404a		1160x700x1000	0	0	230/50	1220x760x1080	96/111
	-24° / -18°C	R404a		1160x700x860	0	0	230/50	1220x760x940	96/111

Condensing unit R404a

-24° / -18°C	R404a		1160x700x900	0	0	230/50	1220x760x980	96/111
-24° / -18°C	R404a		1160x700x1000	0	0	230/50	1220x760x1080	96/111
-24° / -18°C	R404a		1160x700x860	0	0	230/50	1220x760x940	96/111

Condensing unit R404a

Price Increase for condensation water bowl for counters without condensing unit (R model)

"C" pair of runners for GN 1/1 pans

Plastic coated GN 1/1 shelf

S/S GN 1/1 shelf

Price Increase for block of 2 x 1/2 drawers (per/for mod. TN e BT)

Price Increase for Block of 3 x 1/3 drawers (solo per/only for mod.TN)

Price Increase for block of 1/3+2/3 drawers (solo per/only for mod.TN)

Price increase for 4 castors

Price Increase for Power supply 220V/60Hz

*Max distance 5 mt ** R = Remote Version **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

FOR OTHER OPTIONS & ACCESSORIES PLEASE SEE PP. 134/135

Fluorinated greenhouse refrigerant gases are contained in hermetically sealed equipment.

All specifications are subject to change without notice.



SPRING

703Big

	Modello <i>Model</i>	Codice <i>Code</i>		Piano <i>Worktop</i>	Unità Condensatrice <i>Condensing Unit</i>	
	SPRINGBIG703TN	7SB73IP4VA001		piano dritto / straight worktop	Si/Yes	
	SPRINGBIG703TN/A	7SB73IP4LA001		piano + alzatina / work top with splashback	Si/Yes	
	SPRINGBIG703TN/S	7SB73IP4NA001		senza piano / without worktop	Si/Yes	
	SPRINGBIG703BT	7SB73IB4VA001		piano dritto / straight worktop	Si/Yes	
	SPRINGBIG703BT/A	7SB73IB4LA001		piano + alzatina / work top with splashback	Si/Yes	
	SPRINGBIG703BT/S	7SB73IB4NA001		senza piano / without worktop	Si/Yes	
	SPRINGBIG703TN R**	7SB73RP4VA001		piano dritto / straight worktop	No	
	SPRINGBIG703TN/A R	7SB73RP4LA001		piano + alzatina / work top with splashback	No	
	SPRINGBIG703TN/S R**	7SB73RP4NA001		senza piano / without worktop	No	
	UCTN2-T*	74861754		Unità Condensatrice R404a		
	SPRINGBIG703BT R**	7SB73RB4VA001		piano dritto / straight worktop	No	
	SPRINGBIG703BT/A R**	7SB73RB4LA001		piano + alzatina / work top with splashback	No	
	SPRINGBIG703BT/S R**	7SB73RB4NA001		senza piano / without worktop	No	
	UCBT2-T*	74861762		Unità Condensatrice R404a		
	EVAP-T			Sovrapprezzo per vaschetta evapora condensa per tavoli senza gruppo R		
		74768458-60		Coppia guide a "C" per griglie GN 1/1		
		74768000		Griglia plastificata GN 1/1		
		74768002		Griglia inox GN 1/1		
	CASS1/2			Sovrapprezzo per cassettiera 2 cassetti 1/2		
	CASS1/3			Sovrapprezzo per cassettiera 3 cassetti 1/3		
	CASS2/3			Sovrapprezzo per cassettiera cassetti 1/3+2/3		
	KIT 4 RUOTE			Sovrapprezzo per 4 ruote		
	VERS220-60			Sovrapprezzo per Versione 220V/60Hz		

* Distanza massima 5 mt ** R = Versione remota **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

PER ALTRI OPTIONAL E ACCESSORI VEDI PG. 134/135

I gas fluorurati a effetto serra sono contenuti in apparecchiature ermeticamente sigillate.

Dati tecnici e caratteristiche soggetti a cambiamento senza preavviso.



Tavoli refrigerati ventilati per la ristorazione GN1/1, MAXI altezza maggiorata (h 900mm), 3 porte GN1/1, in acciaio inox AISI 304, con gas refrigerante R404a (GWP3780).

- Profondità 700 mm, isolamento 60mm
- TN (-2°C/+7°C) o BT (-24°C/-18°C)
- Controller elettronico con display digitale. Funzioni di overcooling e controllo umidità standard
- Gruppo incorporato o versione remota
- Fermo porta a 90° e richiamo automatico
- Interni arrotondati, evaporatore rialzato e scarico integrato per una pulizia facilitata
- Sbrinamento ed evaporazione dell'acqua di condensa automatici (solo incorporati)
- Accessori interni di serie per porta: 1 griglia GN1/1 plastificata su coppia guide in acciaio

Optional:

filtro removibile, ozonizzatore, cassetti 1/2, 1/3, 2/3.

S/s AISI 304, 3 doors GN 1/1 refrigerated counters, MAXI height (h 900mm), with R404a refrigerant (GWP3780).

- 700 mm depth, 60mm thick insulation
- TN (-2°C/+7°C) or BT (-24°C/-18°C)
- Electronic controller with digital temperature display. Overcooling and humidity control standard functions
- Incorporated or remote unit
- 90° stop self-closing doors
- Inner bottom panel with rounded corners, raised evaporator and integrated water discharge pipe for easy cleaning
- Automatic systems for defrosting and evaporation of the condensation water (only models with built-in unit)
- Standard fitting per door: 1 GN1/1 plastic coated shelf on s/s runners

Optional:

removable filter, ozonizer, drawers 1/1, 1/3, 2/3.



CASS1/2



CASS1/3



CASS2/3



KIT 4 RUOTE



VERS 220-60



	Range °C Range °C	Gas / Gas gr		Dimensioni (mm) Dimensions (mm)	Assorbimento / Absorbed power		Vtaggio/Voltage V/Hz	Dimensioni imballo (mm) Packing dimensions (mm)	Peso Netto/Lordo (Kg) Net/Gross weight (kg)
					Watt****	Ampere			
	-2/+7°C	R404a	250	1780x700x900	275	5.22	230/50	1840x760x980	120/135
	-2/+7°C	R404a	250	1780x700x1000	275	5.22	230/50	1840x760x1080	120/135
	-2/+7°C	R404a	250	1780x700x860	275	5.22	230/50	1840x760x940	120/135
	-24° / -18°C	R404a	300	1780x700x900	634	9.15	230/50	1840x760x980	150/165
	-24° / -18°C	R404a	300	1780x700x1000	634	9.15	230/50	1840x760x1080	150/165
	-24° / -18°C	R404a	300	1780x700x860	634	9.15	230/50	1840x760x940	150/165
	-2/+7°C	R404a		1640x700x900	0	0	230/50	1700x760x980	112/127
	-2/+7°C	R404a		1640x700x1000	0	0	230/50	1700x760x1080	112/127
	-2/+7°C	R404a		1640x700x860	0	0	230/50	1700x760x940	112/127
Condensing unit R404a									
	-24° / -18°C	R404a		1640x700x900	0	0	230/50	1700x760x980	112/127
	-24° / -18°C	R404a		1640x700x1000	0	0	230/50	1700x760x1080	112/127
	-24° / -18°C	R404a		1640x700x860	0	0	230/50	1700x760x940	112/127

Condensing unit R404a

Price Increase for condensation water bowl for counters without condensing unit (R model)

"C" pair of runners for GN 1/1 pans

Plastic coated GN 1/1 shelf

S/S GN 1/1 shelf

Price Increase for block of 2 x 1/2 drawers (per/for mod. TN e BT)

Price Increase for Block of 3 x 1/3 drawers (solo per/only for mod.TN)

Price Increase for block of 1/3+2/3 drawers (solo per/only for mod.TN)

Price increase for 4 castors

Price Increase for Power supply 220V/60Hz

*Max distance 5 mt ** R = Remote Version **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

FOR OTHER OPTIONS & ACCESSORIES PLEASE SEE PP. 134/135

Fluorinated greenhouse refrigerant gases are contained in hermetically sealed equipment.

All specifications are subject to change without notice.



SPRING

704Big

	Modello <i>Model</i>	Codice <i>Code</i>		Piano <i>Worktop</i>	Unità Condensatrice <i>Condensing Unit</i>	
	SPRINGBIG704TN	7SB74IP4VA001		piano dritto / straight worktop	Si/Yes	
	SPRINGBIG704TN/A	7SB74IP4LA001		piano + alzatina / work top with splashback	Si/Yes	
	SPRINGBIG704TN/S	7SB74IP4NA001		senza piano / without worktop	Si/Yes	
	SPRINGBIG704BT	7SB74IB4VA001		piano dritto / straight worktop	Si/Yes	
	SPRINGBIG704BT/A	7SB74IB4LA001		piano + alzatina / work top with splashback	Si/Yes	
	SPRINGBIG704BT/S	7SB74IB4NA001		senza piano / without worktop	Si/Yes	
	SPRINGBIG704TN R**	7SB74RP4VA001		piano dritto / straight worktop	No	
	SPRINGBIG704TN/A R**	7SB74RP4LA001		piano + alzatina / work top with splashback	No	
	SPRINGBIG704TN/S R**	7SB74RP4NA001		senza piano / without worktop	No	
	UCTN3-T*	74861756		Unità Condensatrice R404a		
	SPRINGBIG704BT R**	7SB74RB4VA001		piano dritto / straight worktop	No	
	SPRINGBIG704BT/A R**	7SB74RB4LA001		piano + alzatina / work top with splashback	No	
	SPRINGBIG704BT/S R**	7SB74RB4NA001		senza piano / without worktop	No	
	UCBT3- T*	74861764		Unità Condensatrice R404a		
	EVAP-T			Sovrapprezzo per vaschetta evapora condensa per tavoli senza gruppo R		
		74768458-60		Coppia guide a "C" per griglie GN 1/1		
		74768000		Griglia plastificata GN 1/1		
		74768002		Griglia inox GN 1/1		
	CASS1/2			Sovrapprezzo per cassettiera 2 cassetti 1/2		
	CASS1/3			Sovrapprezzo per cassettiera 3 cassetti 1/3		
	CASS2/3			Sovrapprezzo per cassettiera cassetti 1/3+2/3		
	KIT 6 RUOTE			Sovrapprezzo per 6 ruote		
	VERS220-60			Sovrapprezzo per Versione 220V/60Hz		

* Distanza massima 5 mt ** R = Versione remota **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

PER ALTRI OPTIONAL E ACCESSORI VEDI PG. 134/135

I gas fluorurati a effetto serra sono contenuti in apparecchiature ermeticamente sigillate.

Dati tecnici e caratteristiche soggetti a cambiamento senza preavviso.



Tavoli refrigerati ventilati per la ristorazione GN1/1, MAXI altezza maggiorata (h 900mm), 4 porte GN1/1, in acciaio inox AISI 304, con gas refrigerante R404a (GWP3780).

- Profondità 700 mm, isolamento 60 mm
- TN (-2°C/+7°C) o BT (-24°C/-18°C)
- Controller elettronico con display digitale. Funzioni di overcooling e controllo umidità standard
- Gruppo incorporato o versione remota
- Fermo porta a 90° e richiamo automatico
- Interni arrotondati, evaporatore rialzato e scarico integrato per una pulizia facilitata
- Sbrinamento ed evaporazione dell'acqua di condensa automatici (solo incorporati)
- Accessori interni di serie per porta: 1 griglia GN1/1 plastificata su coppia guide in acciaio

Optional:

filtro removibile, ozonizzatore, cassetti 1/2, 1/3, 2/3.

S/s AISI 304, 4 doors GN 1/1 refrigerated counters, MAXI height (h 900mm), with R404a refrigerant (GWP3780).

- 700 mm depth, 60mm thick insulation
- TN (-2°C/+7°C) or BT (-24°C/-18°C)
- Electronic controller with digital temperature display. Overcooling and humidity control standard functions
- Incorporated or remote unit
- 90° stop self-closing doors
- Inner bottom panel with rounded corners, raised evaporator and integrated water discharge pipe for easy cleaning
- Automatic systems for defrosting and evaporation of the condensation water (only models with built-in unit)
- Standard fitting per door: 1 GN1/1 plastic coated shelf on s/s runners

Optional:

removable filter, ozonizer, drawers 1/1, 1/3, 2/3.



CASS1/2



CASS1/3



CASS2/3



KIT 4 RUOTE



220 - 60Hz

VERS 220-60



	Range °C Range °C	Gas / Gas		Dimensioni (mm) Dimensions (mm)	Assorbimento / Absorbed power		Vtaggio/Voltage V/Hz	Dimensioni imballo (mm) Packing dimensions (mm)	Peso Netto/Lordo (Kg) Net/Gross weight (kg)
		gr			Watt****	Ampere			
	-2/+7°C	R404a	250	2260x700x900	275	5.22	230/50	2320x760x980	130/145
	-2/+7°C	R404a	250	2260x700x1000	275	5.22	230/50	2320x760x1080	130/145
	-2/+7°C	R404a	250	2260x700x860	275	5.22	230/50	2320x760x940	130/145
	-24° / -18°C	R404a	300	2260x700x900	634	9.15	230/50	2320x760x980	160/175
	-24° / -18°C	R404a	300	2260x700x1000	634	9.15	230/50	2320x760x1080	160/175
	-24° / -18°C	R404a	300	2260x700x860	634	9.15	230/50	2320x760x940	160/175
	-2/+7°C	R404a		2120x700x900	0	0	230/50	2180x760x980	122/137
	-2/+7°C	R404a		2120x700x1000	0	0	230/50	2180x760x1080	122/137
	-2/+7°C	R404a		2120x700x860	0	0	230/50	2180x760x940	122/137
Condensing unit R404a									
	-24° / -18°C	R404a		2120x700x900	0	0	230/50	2180x760x980	122/137
	-24° / -18°C	R404a		2120x700x1000	0	0	230/50	2180x760x1080	122/137
	-24° / -18°C	R404a		2120x700x860	0	0	230/50	2180x760x940	122/137

Condensing unit R404a

-24° / -18°C	R404a		2120x700x900	0	0	230/50	2180x760x980	122/137
-24° / -18°C	R404a		2120x700x1000	0	0	230/50	2180x760x1080	122/137
-24° / -18°C	R404a		2120x700x860	0	0	230/50	2180x760x940	122/137

Condensing unit R404a

Price Increase for condensation water bowl for counters without condensing unit (R model)

"C" pair of runners for GN 1/1 pans

Plastic coated GN 1/1 shelf

S/S GN 1/1 shelf

Price Increase for block of 2 x 1/2 drawers (per/for mod. TN e BT)

Price Increase for Block of 3 x 1/3 drawers (solo per/only for mod.TN)

Price Increase for block of 1/3+2/3 drawers (solo per/only for mod.TN)

Price increase for 6 castors

Price Increase for Power supply 220V/60Hz

*Max distance 5 mt ** R = Remote Version **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

FOR OTHER OPTIONS & ACCESSORIES PLEASE SEE PP. 134/135

Fluorinated greenhouse refrigerant gases are contained in hermetically sealed equipment.

All specifications are subject to change without notice.



SPRING
PLUS R290



800

	Modello Model	Codice Code	Piano Worktop	Range °C Range °C
	SPRINGPLUS802TN	7ST82IP2VA001	piano dritto / straight worktop	-2/+7°C
	SPRINGPLUS802TN/A	7ST82IP2LA001	piano + alzatina / work top with splashback	-2/+7°C
	SPRINGPLUS802TN/S	7ST82IP2NA001	senza piano / without worktop	-2/+7°C
	SPRINGPLUS802BT	7ST82IB2VA001	piano dritto / straight worktop	-24° / -18°C
	SPRINGPLUS802BT/A	7ST82IB2LA001	piano + alzatina / work top with splashback	-24° / -18°C
	SPRINGPLUS802BT/S	7ST82IB2NA001	senza piano / without worktop	-24° / -18°C
	SPRINGPLUS803TN	7ST83IP2VA001	piano dritto / straight worktop	-2/+7°C
	SPRINGPLUS803TN/A	7ST83IP2LA001	piano + alzatina / work top with splashback	-2/+7°C
	SPRINGPLUS803TN/S	7ST83IP2NA001	senza piano / without worktop	-2/+7°C
	SPRINGPLUS803BT	7ST83IB2VA001	piano dritto / straight worktop	-24° / -18°C
	SPRINGPLUS803BT/A	7ST83IB2LA001	piano + alzatina / work top with splashback	-24° / -18°C
	SPRINGPLUS803BT/S	7ST83IB2NA001	senza piano / without worktop	-24° / -18°C
	SPRINGPLUS804TN	7ST84IP2VA001	piano dritto / straight worktop	-2/+7°C
	SPRINGPLUS804TN/A	7ST84IP2LA001	piano + alzatina / work top with splashback	-2/+7°C
	SPRINGPLUS804TN/S	7ST84IP2NA001	senza piano / without worktop	-2/+7°C
	SPRINGPLUS804BT	7ST84IB2VA001	piano dritto / straight worktop	-24° / -18°C
	SPRINGPLUS804BT/A	7ST84IB2LA001	piano + alzatina / work top with splashback	-24° / -18°C
	SPRINGPLUS804BT/S	7ST84IB2NA001	senza piano / without worktop	-24° / -18°C
		74768466-68	Coppia guide a "L" per vassoi EN 600x400	
		74768122	Griglia plastificata EN 600x400	
		74768120	Griglia inox EN 600x400	
	KIT 4 RUOTE		Sovrapprezzo per 4 ruote	
	VERS220-60		Sovrapprezzo per Versione 220V/60Hz	

**** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

PER ALTRI OPTIONAL E ACCESSORI VEDI PG. 134/135

I gas fluorurati a effetto serra sono contenuti in apparecchiature ermeticamente sigillate.

Dati tecnici e caratteristiche soggetti a cambiamento senza preavviso.



Tavoli refrigerati ventilati per la pasticceria, 2, 3, 4 porte EN400x600, in acciaio inox AISI 304, con gas refrigerante ecologico R290.

- Profondità 800 mm, isolamento 60mm
- TN (-2°C/+7°C) o BT (-24°C/-18°C)
- Controller elettronico con display digitale. Funzioni di overcooling e controllo umidità standard
- Gruppo incorporato
- Fermo porta a 90° e richiamo automatico
- Interni arrotondati, evaporatore rialzato e scarico integrato per una pulizia facilitata
- Sbrinamento ed evaporazione dell'acqua di condensa automatici
- Accessori interni di serie per porta: 3 coppie di guide inox per teglie EN 600x400 (teglie non incluse)

Optional:

filtro removibile, ozonizzatore.

S/s AISI 304 pastry refrigerated counters, 2, 3 or 4 EN400x600 doors, with ecofriendly R290 refrigerant.

- 800 mm depth, 60mm thick insulation
- TN (-2°C/+7°C) or BT (-24°C/-18°C)
- Electronic controller with digital temperature display. Overcooling and humidity control standard functions
- Incorporated unit
- 90° stop self-closing doors
- Inner bottom panel with rounded corners, raised evaporator and integrated water discharge pipe for easy cleaning
- Automatic systems for defrosting and evaporation of the condensation water
- Standard fitting per door: 3 s/s pair of runners for EN 600x400 trays (trays are not included)

Optional:

removable filter, ozonizer.



KIT 4 RUOTE



VERS 220-60

**ACCESSORI DI SERIE
STANDARD ACCESSORIES**
Vano refrigerato EN400x600
Refrigerated room EN400x600



	Gas / Gas		Dimensioni (mm) Dimensions (mm)	Assorbimento / Absorbed power		Vtaggio/Voltage V/Hz	Dimensioni imballo (mm) Packing dimensions (mm)	Peso Netto/Lordo (Kg) Net/Gross weight (kg)
	gr			Watt****	Ampere			
	R290	120	1450x800x860	247	5.03	230/50	1510x860x940	110/125
	R290	120	1450x800x960	247	5.03	230/50	1510x860x1040	110/125
	R290	120	1450x800x810	247	5.03	230/50	1510x860x890	110/125
	R290	150	1450x800x860	568	8.52	230/50	1510x860x940	140/155
	R290	150	1450x800x960	568	8.52	230/50	1510x860x1040	140/155
	R290	150	1450x800x810	568	8.52	230/50	1510x860x890	140/155
	R290	120	2004x800x860	247	5.03	230/50	2064x860x940	120/135
	R290	120	2004x800x960	247	5.03	230/50	2064x860x1040	120/135
	R290	120	2004x800x810	247	5.03	230/50	2064x860x890	120/135
	R290	150	2004x800x860	568	8.52	230/50	2064x860x940	150/165
	R290	150	2004x800x960	568	8.52	230/50	2064x860x1040	150/165
	R290	150	2004x800x810	568	8.52	230/50	2064x860x890	150/165
	R290	120	2560x800x860	247	5.03	230/50	2620x860x940	130/145
	R290	120	2560x800x960	247	5.03	230/50	2620x860x1040	130/145
	R290	120	2560x800x810	247	5.03	230/50	2620x860x890	130/145
	R290	150	2560x800x860	568	8.52	230/50	2620x860x940	160/175
	R290	150	2560x800x960	568	8.52	230/50	2620x860x1040	160/175
	R290	150	2560x800x810	568	8.52	230/50	2620x860x890	160/175

"L" pair of runners for EN 60x40 trays

Plastic coated EN 60x40 shelf

S/S EN 600x400 shelf

Price increase for 4 castors

Price Increase for Power supply 220V/60Hz

**** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

FOR OTHER OPTIONS & ACCESSORIES PLEASE SEE PP. 134/135

Fluorinated greenhouse refrigerant gases are contained in hermetically sealed equipment.

All specifications are subject to change without notice.



SPRING

802

	Modello <i>Model</i>	Codice <i>Code</i>		Piano <i>Worktop</i>	Unità Condensatrice <i>Condensing Unit</i>	
	SPRING802TN	7ST82IP4VA001		con piano - with work top	Si/Yes	
	SPRING802TN/A	7ST82IP4LA001		con piano con alzatina - work top with splashback	Si/Yes	
	SPRING802TN/S	7ST82IP4NA001		senza piano - without work top	Si/Yes	
	SPRING802BT	7ST82IB4VA001		con piano - with work top	Si/Yes	
	SPRING802BT/A	7ST82IB4LA001		con piano con alzatina - work top with splashback	Si/Yes	
	SPRING802BT/S	7ST82IB4NA001		senza piano - without work top	Si/Yes	
	SPRING802TN R **	7ST82RP4VA001		con piano - with work top	No	
	SPRING802TN/A R **	7ST82RP4LA001		con piano con alzatina - work top with splashback	No	
	SPRING802TN/S R **	7ST82RP4NA001		senza piano - without work top	No	
	UCTN2-T*	74861752		Unità Condensatrice R404a		
	SPRING802BT R **	7ST82RB4VA001		con piano - with work top	No	
	SPRING802BT/A R **	7ST82RB4LA001		con piano con alzatina - work top with splashback	No	
	SPRING802BT/S R**	7ST82RB4NA001		senza piano - without work top	No	
	UCBT2-T*	74861760		Unità Condensatrice R404a		
	EVAP-T			Sovrapprezzo per vaschetta evaporacondensa per tavoli senza gruppo R		
		74768466-68		Coppia guide a "L" per vassoi EN 600x400		
		74768122		Griglia plastificata EN 600x400		
		74768120		Griglia inox EN 600x400		
	KIT 4 RUOTE			Sovrapprezzo per 4 ruote		
	VERS220-60			Sovrapprezzo per Versione 220V/60Hz		

* Distanza massima 5 mt ** R = Versione remota **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

PER ALTRI OPTIONAL E ACCESSORI VEDI PG. 134/135

I gas fluorurati a effetto serra sono contenuti in apparecchiature ermeticamente sigillate.

Dati tecnici e caratteristiche soggetti a cambiamento senza preavviso.



Tavoli refrigerati ventilati per la pasticceria, 2 porte EN400x600, in acciaio inox AISI 304, con gas refrigerante R404a (GWP3780).

- Profondità 800 mm, isolamento 60mm
- TN (-2°C/+7°C) o BT (-24°C/-18°C)
- Controller elettronico con display digitale. Funzioni di overcooling e controllo umidità standard
- Gruppo incorporato
- Fermo porta a 90° e richiamo automatico
- Interni arrotondati, evaporatore rialzato e scarico integrato per una pulizia facilitata
- Sbrinamento ed evaporazione dell'acqua di condensa automatici (solo incorporati)
- Accessori interni di serie per porta: 3 coppie di guide inox per teglie EN 600x400 (teglie non incluse)

Optional:

filtro removibile, ozonizzatore.

S/s AISI 304 pastry refrigerated counters, 2 EN400x600 doors, with R404a refrigerant (GWP3780).

- 800 mm depth, 60mm thick insulation
- TN (-2°C/+7°C) or BT (-24°C/-18°C)
- Electronic controller with digital temperature display. Overcooling and humidity control standard functions
- Incorporated unit
- 90° stop self-closing doors
- Inner bottom panel with rounded corners, raised evaporator and integrated water discharge pipe for easy cleaning
- Automatic systems for defrosting and evaporation of the condensation water (only models with built-in unit)
- Standard fitting per door: 3 s/s pair of runners for EN 600x400 trays (trays are not included)

Optional:

removable filter, ozonizer.



EVAP-T



KIT 4 RUOTE



VERS 220-60



**ACCESSORI DI SERIE
STANDARD ACCESSORIES**
Vano refrigerato EN400x600
Refrigerated room EN400x600



	Range °C	Gas / Gas	gr	Dimensioni (mm)	Assorbimento / Absorbed power		Voltaggio/Voltage	Dimensioni imballo (mm)	Peso Netto/Lordo (Kg)
	Range °C				Watt****	Ampere			
	-2/+7°C	R404a	250	1450x800x860	275	5.22	230/50	1510x860x940	110/125
	-2/+7°C	R404a	250	1450x800x960	275	5.22	230/50	1510x860x1040	110/125
	-2/+7°C	R404a	250	1450x800x810	275	5.22	230/50	1510x860x890	110/125
	-18/-24°C	R404a	300	1450x800x860	634	9.15	230/50	1510x860x940	140/155
	-18/-24°C	R404a	300	1450x800x960	634	9.15	230/50	1510x860x1040	140/155
	-18/-24°C	R404a	300	1450x800x810	634	9.15	230/50	1510x860x890	140/155
	-2/+7°C	R404a		1310x800x860	0	0	230/50	1370x860x940	102/117
	-2/+7°C	R404a		1310x800x960	0	0	230/50	1370x860x1040	102/117
	-2/+7°C	R404a		1310x800x810	0	0	230/50	1370x860x890	102/117

Condensing unit R404a

-18/-24°C	R404a		1310x800x860	0	0	230/50	1370x860x940	102/117
-18/-24°C	R404a		1310x800x960	0	0	230/50	1370x860x1040	102/117
-18/-24°C	R404a		1310x800x810	0	0	230/50	1370x860x890	102/117

Condensing unit R404a

Price Increase for condensation water bowl for counters without condensing unit (R model)

"L" pair of runners for EN 60x40 trays

Plastic coated EN 60x40 shelf

S/S EN 600x400 shelf

Price increase for 4 castors

Price Increase for Power supply 220V/60Hz

*Max distance 5 mt ** R = Remote Version **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

FOR OTHER OPTIONS & ACCESSORIES PLEASE SEE PP. 134/135

Fluorinated greenhouse refrigerant gases are contained in hermetically sealed equipment.

All specifications are subject to change without notice.



SPRING

803

	Modello <i>Model</i>	Codice <i>Code</i>		Piano <i>Worktop</i>	Unità Condensatrice <i>Condensing Unit</i>	
	SPRING803TN	7ST83IP4VA001		con piano - with work top	Si/Yes	
	SPRING803TN/A	7ST83IP4LA001		con piano con alzatina - work top with splashback	Si/Yes	
	SPRING803TN/S	7ST83IP4NA001		senza piano - without work top	Si/Yes	
	SPRING803BT	7ST83IB4VA001		con piano - with work top	Si/Yes	
	SPRING803BT/A	7ST83IB4LA001		con piano con alzatina - work top with splashback	Si/Yes	
	SPRING803BT/S	7ST83IB4NA001		senza piano - without work top	Si/Yes	
	SPRING803TN R **	7ST83RP4VA001		con piano - with work top	No	
	SPRING803TN/A R**	7ST83RP4LA001		con piano con alzatina - work top with splashback	No	
	SPRING803TN/S R**	7ST83RP4NA001		senza piano - without work top	No	
	UCTN3-T*	74861754		Unità Condensatrice R404a		
	SPRING803BT R **	7ST83RB4VA001		con piano - with work top	No	
	SPRING803BT/A R**	7ST83RB4LA001		con piano con alzatina - work top with splashback	No	
	SPRING803BT/S R **	7ST83RB4NA001		senza piano - without work top	No	
	UCBT3- T*	74861762		Unità Condensatrice R404a		
	EVAP-T			Sovrapprezzo per vaschetta evaporacondensa per tavoli senza gruppo R		
		74768466-68		Coppia guide a "L" per vassoi EN 600x400		
		74768122		Griglia plastificata EN 600x400		
		74768120		Griglia inox EN 600x400		
	KIT 4 RUOTE			Sovrapprezzo per 4 ruote		
	VERS220-60			Sovrapprezzo per Versione 220V/60Hz		

* Distanza massima 5 mt ** R = Versione remota **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

PER ALTRI OPTIONAL E ACCESSORI VEDI PG. 134/135

I gas fluorurati a effetto serra sono contenuti in apparecchiature ermeticamente sigillate.

Dati tecnici e caratteristiche soggetti a cambiamento senza preavviso.



Tavoli refrigerati ventilati per la pasticceria, 3 porte EN400x600, in acciaio inox AISI 304, con gas refrigerante R404a (GWP3780).

- Profondità 800 mm, isolamento 60mm
- TN (-2°C/+7°C) o BT (-24°C/-18°C)
- Controller elettronico con display digitale. Funzioni di overcooling e controllo umidità standard
- Gruppo incorporato
- Fermo porta a 90° e richiamo automatico
- Interni arrotondati, evaporatore rialzato e scarico integrato per una pulizia facilitata
- Sbrinamento ed evaporazione dell'acqua di condensa automatici (solo incorporati)
- Accessori interni di serie per porta: 3 coppie di guide inox per teglie EN 600x400 (teglie non incluse)

Optional:

filtro removibile, ozonizzatore.

S/s AISI 304 pastry refrigerated counters, 3 EN400x600 doors, with R404a refrigerant (GWP3780).

- 800 mm depth, 60mm thick insulation
- TN (-2°C/+7°C) or BT (-24°C/-18°C)
- Electronic controller with digital temperature display. Overcooling and humidity control standard functions
- Incorporated unit
- 90° stop self-closing doors
- Inner bottom panel with rounded corners, raised evaporator and integrated water discharge pipe for easy cleaning
- Automatic systems for defrosting and evaporation of the condensation water (only models with built-in unit)
- Standard fitting per door: 3 s/s pair of runners for EN 600x400 trays (trays are not included)

Optional:

removable filter, ozonizer.



EVAP-T



KIT 4 RUOTE



VERS 220-60



**ACCESSORI DI SERIE
STANDARD ACCESSORIES**
Vano refrigerato EN400x600
Refrigerated room EN400x600



	Range °C Range °C	Gas / Gas	Gas gr	Dimensioni (mm) Dimensions (mm)	Assorbimento / Absorbed power		Votaggio/Voltage V/Hz	Dimensioni imballo (mm) Packing dimensions (mm)	Peso Netto/Lordo (Kg) Net/Gross weight (kg)
				Watt****	Ampere				
	-2/+7°C	R404a	250	2004x800x860	275	5.22	230/50	2064x860x940	120/135
	-2/+7°C	R404a	250	2004x800x960	275	5.22	230/50	2064x860x1040	120/135
	-2/+7°C	R404a	250	2004x800x810	275	5.22	230/50	2064x860x890	120/135
	-18/-24°C	R404a	300	2004x800x860	634	9.15	230/50	2064x860x940	150/165
	-18/-24°C	R404a	300	2004x800x960	634	9.15	230/50	2064x860x1040	150/165
	-18/-24°C	R404a	300	2004x800x810	634	9.15	230/50	2064x860x890	150/165
	-2/+7°C	R404a		1865x800x860	0	0	230/50	1925x860x940	112/127
	-2/+7°C	R404a		1865x800x960	0	0	230/50	1925x860x1040	112/127
	-2/+7°C	R404a		1865x800x810	0	0	230/50	1925x860x890	112/127

Condensing unit R404a

-18/-24°C	R404a		1865x800x860	0	0	230/50	1925x860x940	112/127
-18/-24°C	R404a		1865x800x960	0	0	230/50	1925x860x1040	112/127
-18/-24°C	R404a		1865x800x810	0	0	230/50	1925x860x890	112/127

Condensing unit R404a

Price Increase for condensation water bowl for counters without condensing unit (R model)

"L" pair of runners for EN 60x40 trays

Plastic coated EN 60x40 shelf

S/S EN 600x400 shelf

Price increase for 4 castors

Price Increase for Power supply 220V/60Hz

*Max distance 5 mt ** R = Remote Version **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

FOR OTHER OPTIONS & ACCESSORIES PLEASE SEE PP. 134/135

Fluorinated greenhouse refrigerant gases are contained in hermetically sealed equipment.

All specifications are subject to change without notice.



SPRING

804

	Modello <i>Model</i>	Codice <i>Code</i>		Piano <i>Worktop</i>	Unità Condensatrice <i>Condensing Unit</i>	
	SPRING804TN	7ST84IP4VA001		con piano - with work top	Si/Yes	
	SPRING804TN/A	7ST84IP4LA001		con piano con alzatina - work top with splashback	Si/Yes	
	SPRING804TN/S	7ST84IP4NA001		senza piano - without work top	Si/Yes	
	SPRING804BT	7ST84IB4VA001		con piano - with work top	Si/Yes	
	SPRING804BT/A	7ST84IB4LA001		con piano con alzatina - work top with splashback	Si/Yes	
	SPRING804BT/S	7ST84IB4NA001		senza piano - without work top	Si/Yes	
	SPRING804TN R **	7ST84RP4VA001		con piano - with work top	No	
	SPRING804TN/A R **	7ST84RP4LA001		con piano con alzatina - work top with splashback	No	
	SPRING804TN/S R **	7ST84RP4NA001		senza piano - without work top	No	
	UCTN4-T*	74861756		Unità Condensatrice R404a		
	SPRING804BT R **	7ST84RB4VA001		con piano - with work top	No	
	SPRING804BT/A R **	7ST84RB4LA001		con piano con alzatina - work top with splashback	No	
	SPRING804BT/S R **	7ST84RB4NA001		senza piano - without work top	No	
	UCBT4-T*	74861764		Unità Condensatrice R404a		
	EVAP-T			Sovrapprezzo per vaschetta evaporacondensa per tavoli senza gruppo R		
		74768466-68		Coppia guide a "L" per vassoi EN 600x400		
		74768122		Griglia plastificata EN 600x400		
		74768120		Griglia inox EN 600x400		
	KIT 6 RUOTE			Sovrapprezzo per 4 ruote		
	VERS220-60			Sovrapprezzo per Versione 220V/60Hz		

* Distanza massima 5 mt ** R = Versione remota **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

PER ALTRI OPTIONAL E ACCESSORI VEDI PG. 134/135

I gas fluorurati a effetto serra sono contenuti in apparecchiature ermeticamente sigillate.

Dati tecnici e caratteristiche soggetti a cambiamento senza preavviso.



Tavoli refrigerati ventilati per la pasticceria, 4 porte EN400x600, in acciaio inox AISI 304, con gas refrigerante R404a (GWP3780).

- Profondità 800 mm, isolamento 60mm
- TN (-2°C/+7°C) o BT (-24°C/-18°C)
- Controller elettronico con display digitale. Funzioni di overcooling e controllo umidità standard
- Gruppo incorporato
- Fermo porta a 90° e richiamo automatico
- Interni arrotondati, evaporatore rialzato e scarico integrato per una pulizia facilitata
- Sbrinamento ed evaporazione dell'acqua di condensa automatici (solo incorporati)
- Accessori interni di serie per porta: 3 coppie di guide inox per teglie EN 600x400 (teglie non incluse)

Optional:

filtro removibile, ozonizzatore.

S/s AISI 304 pastry refrigerated counters, 4 EN400x600 doors, with R404a refrigerant (GWP3780).

- 800 mm depth, 60mm thick insulation
- TN (-2°C/+7°C) or BT (-24°C/-18°C)
- Electronic controller with digital temperature display. Overcooling and humidity control standard functions
- Incorporated unit
- 90° stop self-closing doors
- Inner bottom panel with rounded corners, raised evaporator and integrated water discharge pipe for easy cleaning
- Automatic systems for defrosting and evaporation of the condensation water (only models with built-in unit)
- Standard fitting per door: 3 s/s pair of runners for EN 600x400 trays (trays are not included)

Optional:

removable filter, ozonizer.



EVAP-T



KIT 4 RUOTE



VERS 220-60



**ACCESSORI DI SERIE
STANDARD ACCESSORIES**
Vano refrigerato EN400x600
Refrigerated room EN400x600



	Range °C Range °C	Gas / Gas gr	Dimensioni (mm) Dimensions (mm)	Assorbimento / Absorbed power		Vtaggio/Voltage V/Hz	Dimensioni imballo (mm) Packing dimensions (mm)	Peso Netto/Lordo (Kg) Net/Gross weight (kg)	
				Watt****	Ampere				
	-2/+7°C	R404a	250	2560x800x860	275	5.22	230/50	2620x860x940	130/145
	-2/+7°C	R404a	250	2560x800x960	275	5.22	230/50	2620x860x1040	130/145
	-2/+7°C	R404a	250	2560x800x810	275	5.22	230/50	2620x860x890	130/145
	-18/-24°C	R404a	300	2560x800x860	634	9.15	230/50	2620x860x940	160/175
	-18/-24°C	R404a	300	2560x800x960	634	9.15	230/50	2620x860x1040	160/175
	-18/-24°C	R404a	300	2560x800x810	634	9.15	230/50	2620x860x890	160/175
	-2/+7°C	R404a		2420x800x860	0	0	230/50	2480x860x940	122/137
	-2/+7°C	R404a		2420x800x960	0	0	230/50	2480x860x1040	122/137
	-2/+7°C	R404a		2420x800x810	0	0	230/50	2480x860x890	122/137

Condensing unit R404a

-18/-24°C	R404a		2420x800x860	0	0	230/50	2480x860x940	122/137
-18/-24°C	R404a		2420x800x960	0	0	230/50	2480x860x1040	122/137
-18/-24°C	R404a		2420x800x810	0	0	230/50	2480x860x890	122/137

Condensing unit R404a

Price Increase for condensation water bowl for counters without condensing unit (R model)

"L" pair of runners for EN 60x40 trays

Plastic coated EN 60x40 shelf

S/S EN 600x400 shelf

Price increase for 4 castors

Price Increase for Power supply 220V/60Hz

*Max distance 5 mt ** R = Remote Version **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

FOR OTHER OPTIONS & ACCESSORIES PLEASE SEE PP. 134/135

Fluorinated greenhouse refrigerant gases are contained in hermetically sealed equipment.

All specifications are subject to change without notice.




SPRING SALADETTE

702

	Modello <i>Model</i>	Codice <i>Code</i>	Coperchio <i>Lid</i>	Unità Condensatrice <i>Condensing Unit</i>	Range °C <i>Range °C</i>
	SALSPRING702C	7SS72IP4MA001	Con coperchio inox <i>With s/s lid</i>	Si/Yes	-2/+7°C
	SALSPRING702C PLUS	7SS72IP2MA001		Si/Yes	-2/+7°C
	SALSPRING702V	7SS72IP4VA001	Con cupola in vetro con scorrevoli <i>With glass dome with sliding doors</i>	Si/Yes	-2/+7°C
	SALSPRING702V PLUS	7SS72IP2VA001		Si/Yes	-2/+7°C
		74768458-60	Coppia guide a "C" per griglie GN 1/1		
		74768000	Griglia plastificata GN 1/1		
		74768002	Griglia inox GN 1/1		
	KIT 4 RUOTE VERS220-60		Sovrapprezzo per 4 ruote Sovrapprezzo Versione 220V/60Hz		

PER ALTRI OPTIONAL E ACCESSORI VEDI PG. 134/135

Composizione vaschette <i>Pans compositions</i>	Modello <i>Model</i>	Descrizione <i>Description</i>
	S1-100	Composizione vaschette - Pans composition (1xGN1/1+1xGN1/3+1xGN2/3+1xGN1/4)
	S1-100K	
	S1-150	
	S1-150K	
	S2-100	Composizione vaschette - Pans composition (2xGN1/2+3xGN1/3+3xGN1/6)
	S2-100K	
	S2-150	
	S2-150K	

**** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

I gas fluorurati a effetto serra sono contenuti in apparecchiature ermeticamente sigillate.

Condizioni ambiente di funzionamento: MAX umidità 65% MIN temperatura 25°C

Dati tecnici e caratteristiche soggetti a cambiamento senza preavviso.



Saladette refrigerata ventilata con coperchio inox o cupola in vetro. Unità integrata, 2 porte, in acciaio inox AISI 304.

- Profondità 700 mm
- TN (-2°C/+7°C)
- Con coperchio inox telescopico (Mod.C)
- Con cupola in vetro e antine plexi scorrevoli (Mod.V)
- Gas refrigerante R404a (GWP3780) o gas naturale R290
- Fermo porta a 90° e richiamo automatico
- Sbrinamento a sosta ed evaporazione dell'acqua di condensa automatici
- Accessori interni: una coppia guide inox ed una griglia GN 1/1 per porta

Refrigerated saladette counter with s/s lid or glass dome. Integrated unit, 2 doors, s/s AISI 304.

- 700 mm depth
- TN (-2°C/+7°C)
- With s/s telescopic lid (Mod.C)
- With glass dome and plexiglass sliding doors (Mod.V)
- Refrigerant R404a (GWP3780), or natural gas R290
- 90° stop self-closing door
- Automatic defrosting by compressor stop and automatic condensation water evaporation system
- Standard fitting per door: 1 GN1/1 shelf on s/s runners



KIT 4 RUOTE



VERS 220-60



ANTE SCORREVOLI
SLIDING DOOR



Gas / Gas	gr	Dimensioni (mm) Dimensions (mm)	Assorbimento / Absorbed power		Vtaggio / Voltage V/Hz	Dimensioni imballo (mm) Packing dimensions (mm)	Peso Netto/Lordo (Kg) Net/Gross weight (kg)	Tempi di consegna Delivery time
			Watt****	Ampere				
R404a	250	1300x785x1183	275	5.22	230/50	1360x845x1520	110/125	Disponibile non prima di 4 settimane Available not earlier than 4 weeks
R290	120	1300x785x1183	247	5.03	230/50	1360x845x1520	110/125	
R404a	250	1300x785x1327	275	5.22	230/50	1360x845x1520	110/125	
R290	120	1300x785x1327	247	5.03	230/50	1360x845x1520	110/125	

"C" pair of runners for GN 1/1 pans

Plastic coated GN 1/1 shelf

S/S GN 1/1 shelf

Price increase for 4 castors

Price Increase Power supply 220V/60Hz

FOR OTHER OPTIONS & ACCESSORIES PLEASE SEE PP. 134/135

H=100 mm	H=100 mm con coperchio/with lid	H=150 mm	H=150 mm con coperchio/with lid
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•

**** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

Fluorinated greenhouse refrigerant gases are contained in hermetically sealed equipment.

Environment conditions: 65% MAX humidity, 25 °C MIN temperature

All specifications are subject to change without notice.



SPRING SALADETTE

703

	Modello <i>Model</i>	Codice <i>Code</i>	Coperchio <i>Lid</i>	Unità Condensatrice <i>Condensing Unit</i>	Range °C <i>Range °C</i>	
	SALSALAD703C	7SS73IP4MA001	Con coperchio inox <i>With s/s lid</i>	Si/Yes	-2/+7°	
	SALSALAD703C PLUS	7SS73IP2MA001		Si/Yes	-2/+7°C	
	SALSALAD703V	7SS73IP4VA001	Con cupola in vetro con scorrevoli <i>With glass dome with sliding doors</i>	Si/Yes	-2/+7°C	
	SALSALAD703V PLUS	7SS73IP2VA001		Si/Yes	-2/+7°C	
		74768458-60	Coppia guide a "C" per griglie GN 1/1			
		74768000	Griglia plastificata GN 1/1			
		74768002	Griglia inox GN 1/1			
	KIT 4 RUOTE VERS220-60		Sovrapprezzo per 4 ruote			
			Sovrapprezzo per Versione 220V/60Hz			

PER ALTRI OPTIONAL E ACCESSORI VEDI PG. 134/135

Composizione vaschette <i>Pans compositions</i>	Modello <i>Model</i>	Descrizione <i>Description</i>		
	S3-100	Composizione vaschette - Pans composition (1xGN2/1+1xGN1/2+1xGN1/3+1xGN2/3)		
	S3-100K			
	S3-150			
	S3-150K			
	S4-100	Composizione vaschette - Pans composition (1xGN1/1+2xGN1/2+1xGN1/3+1xGN2/3+4xGN1/4)		
	S4-100K			
	S4-150			
	S4-150K			
	S5-100	Composizione vaschette - Pans composition (2xGN1/2+2xGN1/3+2xGN2/3+4xGN1/4)		
	S5-100K			
	S5-150			
	S5-150K			

**** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

I gas fluorurati a effetto serra sono contenuti in apparecchiature ermeticamente sigillate.

Condizioni ambiente di funzionamento: MAX umidità 65% MIN temperatura 25°C

Dati tecnici e caratteristiche soggetti a cambiamento senza preavviso.



Saladette refrigerata ventilata con coperchio inox o cupola in vetro. Unità integrata, 3 porte, in acciaio inox AISI 304.

- Profondità 700 mm
- TN (-2°C/+7°C)
- Con coperchio inox telescopico (Mod.C)
- Con cupola in vetro e antine plexi scorrevoli (Mod.V)
- Gas refrigerante R404a (GWP3780) o gas naturale R290
- Fermo porta a 90° e richiamo automatico
- Sbrinamento a sosta ed evaporazione dell'acqua di condensa automatici
- Accessori interni: una coppia guide inox ed una griglia GN 1/1 per porta

Refrigerated saladette counter with s/s lid or glass dome. Integrated unit, 3 doors, s/s AISI 304.

- 700 mm depth
- TN (-2°C/+7°C)
- With s/s telescopic lid (Mod.C)
- With glass dome and plexiglass sliding doors (Mod.V)
- Refrigerant R404a (GWP3780), or natural gas R290
- 90° stop self-closing door
- Automatic defrosting by compressor stop and automatic condensation water evaporation system
- Standard fitting per door: 1 GN1/1 shelf on s/s runners



KIT 4 RUOTE



VERS 220-60



ANTE SCORREVOLI
SLIDING DOOR



	Gas / Gas		Dimensioni (mm) Dimensions (mm)	Assorbimento / Absorbed power		Voltaggio / Voltage V/Hz	Dimensioni imballo (mm) Packing dimensions (mm)	Peso Netto/Lordo (Kg) Net/Gross weight (kg)	Tempi di consegna Delivery time
		gr		Watt****	Ampere				
	R404a	250	1780x785x1183	275	5.22	230/50	1840x845x1520	120/135	Disponibile non prima di 4 settimane Available not earlier than 4 weeks
	R290	120	1300x785x1183	247	5.03	230/50	1840x845x1520	120/135	
	R404a	250	1780x785x1327	275	5.22	230/50	1840x845x1520	120/135	
	R290	120	1300x785x1327	247	5.03	230/50	1840x845x1520	120/135	

"C" pair of runners for GN 1/1 pans

Plastic coated GN 1/1 shelf

S/S GN 1/1 shelf

Price increase for 4 castors

Price Increase per Power supply 220V/60Hz

FOR OTHER OPTIONS & ACCESSORIES PLEASE SEE PP. 134/135

					H=100 mm	H=100 mm con coperchio/with lid	H=150 mm	H=150 mm con coperchio/with lid
					.	.	.	.
					.	.	.	.
					.	.	.	.
					.	.	.	.
					.	.	.	.
					.	.	.	.
					.	.	.	.
					.	.	.	.

**** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

Fluorinated greenhouse refrigerant gases are contained in hermetically sealed equipment.

Environment conditions: 65% MAX humidity, 25 °C MIN temperature

All specifications are subject to change without notice.




**SPRING
SALADETTE**

702R

	Modello <i>Model</i>	Codice <i>Code</i>		Coperchio <i>Lid</i>	Unità Condensatrice <i>Condensing Unit</i>	Range °C <i>Range °C</i>	
	SALSPRING702C R	7SS72RP4MA001		Con coperchio inox <i>With s/s lid</i>	No	-2/+7°C	
	SALSPRING702V R	7SS72RP4VA001		Con cupola in vetro <i>With glass dome</i>	No	-2/+7°	
	UCTN1-T*	74861752		Unità Condensatrice R404a			
	EVAP-T			Sovrapprezzo per vaschetta evapora condensa per tavoli senza gruppo R			
		74768458-60		Coppia guide a "C" per griglie GN 1/1			
		74768000		Griglia plastificata GN 1/1			
		74768002		Griglia inox GN 1/1			
	KIT 4 RUOTE			Sovrapprezzo per 4 ruote			
	VERS220-60			Sovrapprezzo per Versione 220V/60Hz			

PER ALTRI OPTIONAL E ACCESSORI VEDI PG. 134/135

Composizione vaschette <i>Pans compositions</i>	Modello <i>Model</i>			Descrizione <i>Description</i>	
	S1-100			Composizione vaschette - Pans composition (1xGN1/1+1xGN1/3+1xGN2/3+1xGN1/4)	
	S1-100K				
	S1-150				
	S1-150K				
	S2-100			Composizione vaschette - Pans composition (2xGN1/2+3xGN1/3+3xGN1/6)	
	S2-100K				
	S2-150				
	S2-150K				

* Distanza massima 5 mt ** R = Versione remota **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

I gas fluorurati a effetto serra sono contenuti in apparecchiature ermeticamente sigillate.

Condizioni ambiente di funzionamento: **MAX umidità 65% MIN temperatura 25°C**

Dati tecnici e caratteristiche soggetti a cambiamento senza preavviso.



Saladette refrigerata ventilata predisposta per unità remota, con coperchio inox o cupola in vetro, 2 porte, in acciaio inox AISI 304.

- Profondità 700 mm
- TN (-2°C/+7°C)
- Con coperchio inox telescopico (Mod.C)
- Con cupola in vetro e antine plexi scorrevoli (Mod.V)
- Gas refrigerante R404a (GWP3780)
- Fermo porta a 90° e richiamo automatico
- Sbrinamento a sosta ed evaporazione dell'acqua di condensa automatici (optional)
- Accessori interni: una coppia guide inox ed una griglia GN 1/1 per porta

Refrigerated saladette counter with s/s lid or glass dome. Remote unit, 2 doors, s/s AISI 304.

- 700 mm depth
- TN (-2°C/+7°C)
- With s/s telescopic lid (Mod.C)
- With glass dome and plexiglass sliding doors (Mod.V)
- Refrigerant R404a (GWP3780)
- 90° stop self-closing door
- Automatic defrosting by compressor stop and automatic condensation water evaporation system (optional)
- Standard fitting per door: 1 GN1/1 shelf on s/s runners



UCTN1-T*



EVAP-T



KIT 4 RUOTE



VERS 220-60



ANTE SCORREVOLI
SLIDING DOOR



	Gas	Dimensioni (mm)	Assorbimento / Absorbed power		Vtaggio / Voltage	Dimensioni imballo (mm)	Peso Netto/Lordo (Kg)	Tempi di consegna Delivery time
	Gas	Dimensions (mm)	Watt****	Ampere				
	R404a	1160x785x1183	0	0	230/50	1220x845x1520	102/117	Disponibile non prima di 4 settimane Available not earlier than 4 weeks
	R404a	1160x785x1327	0	0	230/50	1220x845x1520	102/117	

Condensing unit R404a

Price Increase for condensation water bowl for counters without condensing unit (R model)

"C" pair of runners for GN 1/1 pans

Plastic coated GN 1/1 shelf

S/S GN 1/1 shelf

Price increase for 4 castors

Price Increase for Power supply 220V/60Hz

FOR OTHER OPTIONS & ACCESSORIES PLEASE SEE PP. 134/135

	H=100 mm	H=100 mm con coperchio/with lid	H=150 mm	H=150 mm con coperchio/with lid
	•	•	•	•
	•	•	•	•

*Max distance 5 mt ** R = Remote Version **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

Fluorinated greenhouse refrigerant gases are contained in hermetically sealed equipment.

Environment conditions: 65% MAX humidity, 25 °C MIN temperature

All specifications are subject to change without notice.



SPRING SALADETTE

703R

	Modello <i>Model</i>	Codice <i>Code</i>	Coperchio <i>Lid</i>	Unità Condensatrice <i>Condensing Unit</i>	Range °C <i>Range °C</i>	
	SALSPRING703C R	7SS73RP4MA001	Con coperchio inox <i>With s/s lid</i>	No	-2/+7°C	
	SALSPRING703V R	7SS73RP4VA001	Con cupola in vetro <i>With glass dome</i>	No	-2/+7°C	
	UCTN2-T*	74861754		Unità Condensatrice R404a		
	EVAP-T	74768458-60 74768000 74768002		Sovrapprezzo per vaschetta evapora condensa per tavoli senza gruppo R		
				Coppia guide a "C" per griglie GN 1/1		
				Griglia plastificata GN 1/1		
				Griglia inox GN 1/1		
	KIT 4 RUOTE			Sovrapprezzo per 4 ruote		
	VERS220-60			Sovrapprezzo per Versione 220V/60Hz		

PER ALTRI OPTIONAL E ACCESSORI VEDI PG. 134/135

Composizione vaschette <i>Pans compositions</i>	Modello <i>Model</i>		Descrizione <i>Description</i>	
	S3-100 S3-100K S3-150 S3-150K		Composizione vaschette - Pans composition (1xGN2/1+1xGN1/2+1xGN1/3+1xGN2/3)	
	S4-100 S4-100K S4-150 S4-150K		Composizione vaschette - Pans composition (1xGN1/1+2xGN2/1+1xGN1/3+1xGN2/3+4xGN1/4)	
	S5-100 S5-100K S5-150 S5-150K		Composizione vaschette - Pans composition (2xGN1/2+2xGN1/3+2xGN2/3+4xGN1/4)	

* Distanza massima 5 mt ** R = Versione remota **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

I gas fluorurati a effetto serra sono contenuti in apparecchiature ermeticamente sigillate.

Condizioni ambiente di funzionamento: MAX umidità 65% MIN temperatura 25°C

Dati tecnici e caratteristiche soggetti a cambiamento senza preavviso.



Saladette refrigerata ventilata predisposta per unità remota, con coperchio inox o cupola in vetro, 3 porte, in acciaio inox AISI 304.

- Profondità 700 mm
- TN (-2°C/+7°C)
- Con coperchio inox telescopico (Mod.C)
- Con cupola in vetro e antine plexi scorrevoli (Mod.V)
- Gas refrigerante R404a (GWP3780)
- Fermo porta a 90° e richiamo automatico
- Sbrinamento a sosta ed evaporazione dell'acqua di condensa automatici (optional)
- Accessori interni: una coppia guide inox ed una griglia GN 1/1 per porta

Refrigerated saladette counter with s/s lid or glass dome. Remote unit, 3 doors, s/s AISI 304.

- 700 mm depth
- TN (-2°C/+7°C)
- With s/s telescopic lid (Mod.C)
- With glass dome and plexiglass sliding doors (Mod.V)
- Refrigerant R404a (GWP3780)
- 90° stop self-closing door
- Automatic defrosting by compressor stop and automatic condensation water evaporation system (optional)
- Standard fitting per door: 1 GN1/1 shelf on s/s runners



UCTN2-T*



EVAP-T



KIT 4 RUOTE



VERS 220-60



ANTE SCORREVOLI
SLIDING DOOR



Gas Gas	Dimensioni (mm) Dimensions (mm)	Assorbimento / Absorbed power		Vtaggio / Voltage V/Hz	Dimensioni imballo (mm) Packing dimensions (mm)	Peso Netto/Lordo (Kg) Net/Gross weight (kg)	Tempi di consegna Delivery time
		Watt****	Ampere				
R404a	1640x785x1183	0	0	230/50	1700x845x1520	112/127	Disponibile non prima di 4 settimane Available not earlier than 4 weeks
R404a	1640x785x1327	0	0	230/50	1700x845x1520	112/127	

Condensing unit R404a

Price Increase for condensation water bowl for counters without condensing unit (R model)

"C" pair of runners for GN 1/1 pans

Plastic coated GN 1/1 shelf

S/S GN 1/1 shelf

Price increase for 4 castors

Price Increase for Power supply 220V/60Hz

FOR OTHER OPTIONS & ACCESSORIES PLEASE SEE PP. 134/135

	H=100 mm	H=100 mm con coperchio/with lid	H=150 mm	H=150 mm con coperchio/with lid
	•			
		•		
			•	
	•			•
		•		
			•	
	•			•
		•		
			•	
				•

*Max distance 5 mt ** R = Remote Version **** Watt TN (-10/+45°C) - Watt BT (-30/+45°C)

Fluorinated greenhouse refrigerant gases are contained in hermetically sealed equipment.

Environment conditions: 65% MAX humidity, 25 °C MIN temperature

All specifications subject to change without notice.

Accessori e Optional

Modello Model	Codice Code	Descrizione Description	SPRING 700	SPRING BIG 700	SPRING 800	SPRING SALADETTE 700
OPTIONAL						
VERS110-60		Sovrapprezzo per Versione 110V/60Hz (Disponibile non prima di 6 settimane) <i>Price increase for Power supply 110V/60Hz (Available not earlier than 6 weeks)</i>	x	x	x	x
VERSC02		Sovrapprezzo per Versione remota per C02 <i>Price increase for Ready for connection to a remote C02 condensing unit</i>	x	x		
STERILKIT		Sovrapprezzo per Sterilizzatore <i>Price increase for Sterilizer</i>	x	x	x	x
PORVE700*		Sovrapprezzo per porta vetri TN, a porta <i>SPRING700</i> <i>Price Increase for TN glass door (per door) SPRING700</i>	x	x		x
PORVE800*		Sovrapprezzo per porta vetri TN, a porta <i>SPRING800</i> <i>Price Increase for TN glass door (per door) SPRING800</i>			x	
PORVELED		Sovrapprezzo per illuminazione a LED <i>Price increase for LED light, for glass door</i>	x	x	x	
99RAGTRX500		Sovrapprezzo per Piano inox arrotondato frontalmente <i>Price increase for Rounded front top</i>	x	x	x	
SERRPSPRING		Sovrapprezzo per Kit Serratura con chiave porta <i>Price increase for Door kit key lock</i>	x	x	x	
SERRCSPRING		Sovrapprezzo per Kit Serratura con chiave cassetiera <i>Price increase for key lock kit for set of Drawers</i>	x	x		
SBRINELETSRING		Sovrapprezzo per Sbrinamento elettrico <i>Price increase for Electrical defrost (per versione/for version TN)</i>	x	x	x	x
EVAPINOX		Sovrapprezzo per Evaporatore inox <i>Price increase for Stainless steel evaporator</i>	x	x		
UCESXSPRING		Sovrapprezzo per Motore a sx <i>Price increase for Condensing unit on the left</i>	x	x	x	x
SOVLAV		Sovrapprezzo per Lavello e foro rubinetto sopra vano motore (solo per TN con piano con alzatina) - <i>Price increase for Sink and tap hole above the condensing unit (only for counters with splashback)</i>	x	x	x	
SOVH890		Sovrapprezzo per Altezza 890mm (+20mm h volume interno) <i>Price increase for 890mm height (+20mm loading capacity)</i>				x
SOVP800		Sovrapprezzo per piano profondità 800 mm <i>Price increase for 800mm worktop depth</i>	x	x		
CONDH20SPRING		Sovrapprezzo per condensazione ad acqua <i>Price increase for condensation by water</i>	x	x	x	x
FILTER		Sovrapprezzo filtro removibile <i>Price increase removable filter</i>	x	x	x	x

*Condizioni ambiente di funzionamento: MAX umidità 65% MIN temperatura 25°C (macchine dedicate solo all'esposizione)

*Environment conditions: 65% humidity MAX MIN temperature 25 °C (machinery dedicated only to display)



Accessories & Optionals

Modello Model	Codice Code	Descrizione Description	SPRING 700	SPRING BIG 700	SPRING 800	SPRING SALADETTE 700
ACCESSORI/ ACCESSORIES						
	74700280	Driver per supervisori già in possesso - Driver for already owned supervisor (RS485)	x	x	x	x
*	73686562+ 74700170	Supervisore BASE - BASE Supervisor (Nr Max. Unità/Units 20)	x	x	x	x
*	73686562+ 74700172	Supervisore TOP - TOP Supervisor (Nr Max. Unità/Units 100)	x	x	x	x
	74768120	Griglia inox EN 600x400 - S/S EN 600x400 shelf			x	
	74768122	Griglia plastificata EN 600x400 - Plastic coated EN 60x40 shelf			x	
	74768002	Griglia inox GN 1/1 - S/S GN 1/1 shelf	x	x		x
	74768000	Griglia plastificata GN 1/1 - plastic coated GN 1/1 shelf	x	x		x
	74707012	Teglia GN 1/1 h=20 - GN 1/1 pan 20mm deep	x	x		x
	74707013	Teglia GN 1/1 h=40 - GN 1/1 pan 40mm deep	x	x		x
	74707300	Vassoio inox pasticceria EN400x600 h=20mm - EN 600x400 tray 20 mm deep			x	
	74707301	Vassoio inox pasticceria EN400x600 h=40mm - EN 600x400 tray 40 mm deep			x	
	74707295	Vaschetta pesce polietilene 400x600 h=130mm - Fish container 400x600x130mm			x	
	74707297	Vaschetta pesce polietilene 400x300 h=130mm - Fish container 400x300x130 mm			x	
	72554699	Falsofondo plastica per VP5/130 - Plastic perforated bottom for VP5/130			x	
	72554695	Falsofondo inox forato per VP5/130 - S/S perforated bottom for VP5/130			x	
	72554697	Falsofondo inox forato per VP2/130 - S/S perforated bottom for VP2/130			x	
	74707299	Vaschetta pizza polietilene 400x600 h=70mm - Pizza plastic container 400x600x70mm			x	
	74707288	Coperchio per vaschetta pizza polietilene - Lid for pizza plastic container (400x600 h=70mm)			x	

** All'acquisto di più unità che si vogliano tutte collegate a supervisore, oltre al costo dell'accessorio BASE o TOP calcolato su una unità, andrà considerato il costo di un driver di connessione (cod. 74700280) per ogni ulteriore unità acquistata.

** When you purchase more units and would like to connect them to a supervisor, in addition to the base or top accessory's cost of a single unit, you must consider the price of a connection driver (cod. 74700280) for any further purchased unit.