

arneg

www.arneg.it

Belgrado 2



Serve-over counters



Semi-vertical

YOUR NATURALLY INNOVATIVE PARTNER FOR RETAIL SOLUTIONS



into the World

Belgrado 2 serve-over counters		Lunghezza senza spalle Length without ends Länge ohne Seiten Longeur sans joues Longitud sin laterales Длина без боковин	Temperatura di esercizio Working temperature Betriebstemperatur Temp. de fonctionnement Temperatura de trabajo Рабочая температура	Superficie di esposizione orizzontale Horizontal display surface Gesamte Ausstellfläche Surface d'exposition horizontale Superficie de exposición de apoyo Горизонтальная площадь экспозиции	Capacità utile Net volume Nutzleistung Capacité utile Capacidad útil Полезный объем
		mm	°C	m ²	dm ³
VDL-VDA-SELF	070	937	0°C/+2°C +2°C/+4°C	0,66	131
		1250		0,88	175
		1875		1,31	263
		2500		1,75	350
		3125		2,19	438
		3750		2,63	525
	080	937		0,75	150
		1250		1,00	200
		1875		1,50	300
		2500		2,00	400
		3125		2,50	500
		3750		3,00	600
	083	937		0,78	156
		1250		1,04	208
		1875		1,56	311
		2500		2,08	415
		3125		2,59	519
		3750		3,11	623
090	937	0,84	169		
	1250	1,13	225		
	1875	1,68	338		
	2500	2,25	450		
	3125	2,81	563		
	3750	3,38	675		
CK VDL-VDA	070	1250	+2°C/+4°C	1,13	175
		1875		1,69	263
		2500		2,25	350
	080	1250		1,25	200
		1875		1,88	300
		2500		2,50	400
	090	1250		1,38	225
		1875		2,06	338
		2500		2,75	450
FH VDL-VDA-SELF	090	937	0°C/+2°C	0,76	83
		1250		1,02	111
		1875		1,53	166
		2500		2,04	222
		3750		3,05	333
BD VDL-VDA	070	1250	Ambiente Ambient	0,76	88
		2500		1,53	176
	090	1250		0,98	113
		1875		1,48	170
		2500		1,97	226
		3750		2,96	340
BT VDL-VDA	090	1250	-18°C/-25°C	1,03	319
		1875		1,58	479
		2500		2,10	638
		3750		3,09	957
TCPW VDL-VDA	080	937	+65°C	0,40	*
		1250		0,56	
	090	937		0,54	
		1250		0,76	
TCBM VDL-VDA	090	937	0,54		
		1250	0,76		
ATB		1250	+2°C/+4°C	1,04	665


* Il dato varia in funzione della quantità e del tipo di contenitori Gastronorm utilizzati, This data may vary depending on the number and type of Gastronorm trays, Die Zahl variiert je nach Menge und Art von Gastronorm Behältern, Le chiffre varie selon la quantité et le type de bacs GN utilisés, La cifra varía dependiendo de la cantidad y tipo de recipientes Gastronorm utilizados, Показатель варьируется в зависимости от количества и типа используемых гастроёмкостей




VDL




VDA




070 VDL-VDA




080 VDL-VDA




083 VDA-VDL




090 VDL-VDA




070 SELF




080 SELF




083 SELF




090 SELF




070 VDL-VDA CK




080 VDL-VDA CK




090 VDL-VDA CK




090 VDL-VDA FH




090 SELF FH




070 VDL-VDA BD




090 VDL-VDA BD




VDL-VDA BT




080 VDL-VDA TCPW



090 VDL-VDA TCPW



090VDL-VDA TCBM

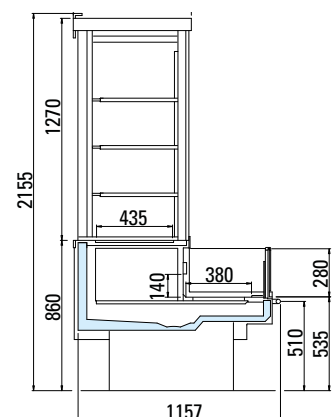

ATB

Belgrado 2 semi-vertical


Lunghezza senza spalle
Length without ends
Länge ohne Seiten
Longeur sans joues
Longitud sin laterales
Длина без боковин

Temperatura di esercizio
Working temperature
Betriebstemperatur
Temp. de fonctionnement
Temperatura de trabajo
Рабочая температура


Superficie di esposizione orizzontale
Horizontal display surface
Gesamte Ausstellungsfläche
Surface d'exposition horizontale
Superficie de exposición de apojo
Горизонтальная площадь экспозиции

Capacità utile
Net volume
Nutzleistung
Capacité utile
Capacidad útil
Полезный объем


		mm	°C	m ²	dm ³
H114	080	1250	0°C/+2°C +2°C/+4°C	1,5	400
		1875		2,2	600
		2500		3,0	800
	090	2500		3,2	860
		3125		4,0	1074
		3750		4,8	1289
H125	080	1250		1,5	435
		1875		2,2	653
		2500		3,0	870
		3750		4,4	1304
		TST		2,2	707
		1250		1,6	471
	090	1875		2,4	707
		2500		3,2	942
		3125		4,0	1178
		3750		4,8	1414
		TST		2,4	707
		1250		3,7	1160
H150	080	2500	3,7	1160	
		3125	4,6	1450	
		3750	5,5	1740	
	090	937	1,7	470	
		1250	2,2	627	
		1875	3,4	940	
		2500	4,5	1254	
		3125	5,6	1567	
		3750	6,7	1880	
		TST	3,3	940	

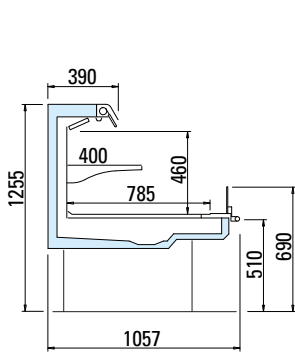


080 H114




080 H125

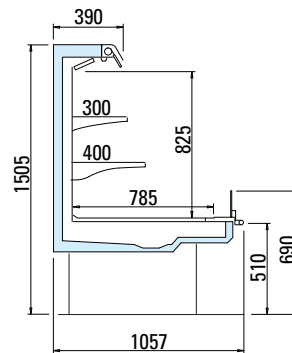


080 H150



090 H114



090 H125



090 H150



ARNEG S.p.A. - Via Venezia, 58 - 35010 Campo San Martino (PD) Italy - Tel. +39 049 9699333 - Fax +39 049 9699444 - RAEE IT801000000139
Certified ISO 9001:2008 - ISO 14001:2004 - ISO 50001:2011 - BSOHSAS 18001:2007

Contenuto modificabile senza preavviso. Content can be changed without notice. Inhalt Veränderbar ohne Vorankündigung. Contenu modifiable sans préavis. Contenido modificable sin previo aviso. Содержание изменяется без предупреждения