

# KBA


 ACCAVALLATI  
 OVERLAPPING  
 CHEVAUCHÉS  
 ÜBERLAPPENDE  
 SOBREPUESTOS

**10 BT E M**
**13 BT E M**

	KBA 10 BT E M	KBA 13 BT E M	Modello	Model	Modèle	Modell	Modelo		
°C	-18 ÷ -22	-18 ÷ -22	Campo applicazione	Application field	Champe d'application	Anwendungsbereich	Campo d'applicación		
	230V/1/50Hz	230V/1/50Hz	Alimentazione	Power supply	Alimentation	Netzanschluß	Alimentación		
A	7,3	9,1	Corrente max. assorbita	Max. absorbed current	Courant absorbé max.	Max. absorbierter Strom	Corriente máx. absorbida		
kW	1,5	1,9	Potenza max. assorbita	Max. absorbed power	Puissance max. absorbée	Max. aufgenommene Leistung	Máx. potencia absorbida		
	R452A	R452A	Tipo refrigerante	Refrigerant type	Tipe du gaz	Kältemittel	Tipo refrigerante		
W	734	884	Resa *	Capacity *	Puissance *	Leistung *	Rendimiento *		
CMP	CV	1.2	1.7	Potenza nominale	Power rating	Puissance nominale	Nennleistung	Potencia nominal	
		E	E	Tipo compressore	Compressor type	Type compresseur	Kompressortyp	Tipo compresor	
CND	mm	2.5	2.5	Passo alette	Fin spacing	Ecart alettes	Lamellenabstand	Paso aletas	
		1 x Ø 254	1 x Ø 254	Ventilatori	Fan	Ventilateur	Ventilator	Ventiladores	
	W	73	73	Pot. nom. assorbita	Nom. power cons.	Puiss. nom. absorbée	Nennleistungsaufnahme	Pot. nominal absorbida	
	m <sup>3</sup> /h	750	750	Portata aria	Air volume	Debit d' air	Volumenstrom	Caudal aire	
EVP	mm	4.2	4.2	Passo alette	Fin spacing	Ecart alettes	Lamellenabstand	Paso aletas	
		HG	HG	Sbrinamento	Defrost	Dégivrage	Abtauung	Descongelación	
		VT	VT	Espansione	Expansion	Expansion	Expansion	Expansión	
		1 x Ø 254	1 x Ø 254	Ventilatori	Fan	Ventilateur	Ventilator	Ventiladores	
	W	73	73	Pot. nom. assorbita	Nom. power cons.	Puiss. nom. absorbée	Nennleistungsaufnahme	Pot. nominal absorbida	
		m <sup>3</sup> /h	700	700	Portata aria	Air volume	Debit d' air	Volumenstrom	Caudal aire
	m	3	3	Freccia d' aria	Air throw	Projection d'air	Reichweite	Flecha de aire	
kg	61	62	Peso netto	Net Weight	Poids net	Nettogewicht	Peso neto		
kg	83	84	Peso lordo	Gross weight	Poids brut	Bruttogewicht	Peso bruto		
	111102179	111102180	Codice	Code	Code	Kodex	Codigo		


\* = -30°C / +40°C BT

mm	1020	X	Imballi Packing
mm	520	Y	Emballage
mm	925	Z	Verpackung Embalajes



C : Capillare / Capillary / Capillaire / Kapillar / Capilar  
 CMP: Compressore / Compressor / Compresseur / Kompressorleistung / Compresor  
 CND: Condensatore / Condenser / Condenseur / Verflüssiger / Condensador  
 E : Ermetico / Hermetic / Hermetique / Vollhermetisch / Hermético  
 EVP: Evaporatore / Evaporateur / Evaporateur / Verdampfer / Evaporador  
 HG : Gas caldo / Hot gas / Gaz chaud / Heissgas / Gas caliente  
 P : Potenza frigorifera / Cooling capacity / Puissances frigorifiques / Kälteleistung  
 Potencia frigorífica

S : Semiermetico / Semihermetic / Semi-hermetique / Halbhermetisch / Semihermético  
 Ta : Temperatura ambiente / Ambient temperature / Température ambiante  
 Umgebungstemperatur / Temperatura ambiente  
 Tc : Temperatura cella / Cold room temperature / Température chambre froid  
 Kühlraumtemperatur / Temperatura cámara  
 V : Volume cella / Coldroom volume / Volume chambre / Kühlzellenvolumen / Volumen cámara  
 VT : Valvola termostatica / Expansion valve / Détendeur thermostatique / Thermostatisches  
 Expansionsventil / Válvula termostática

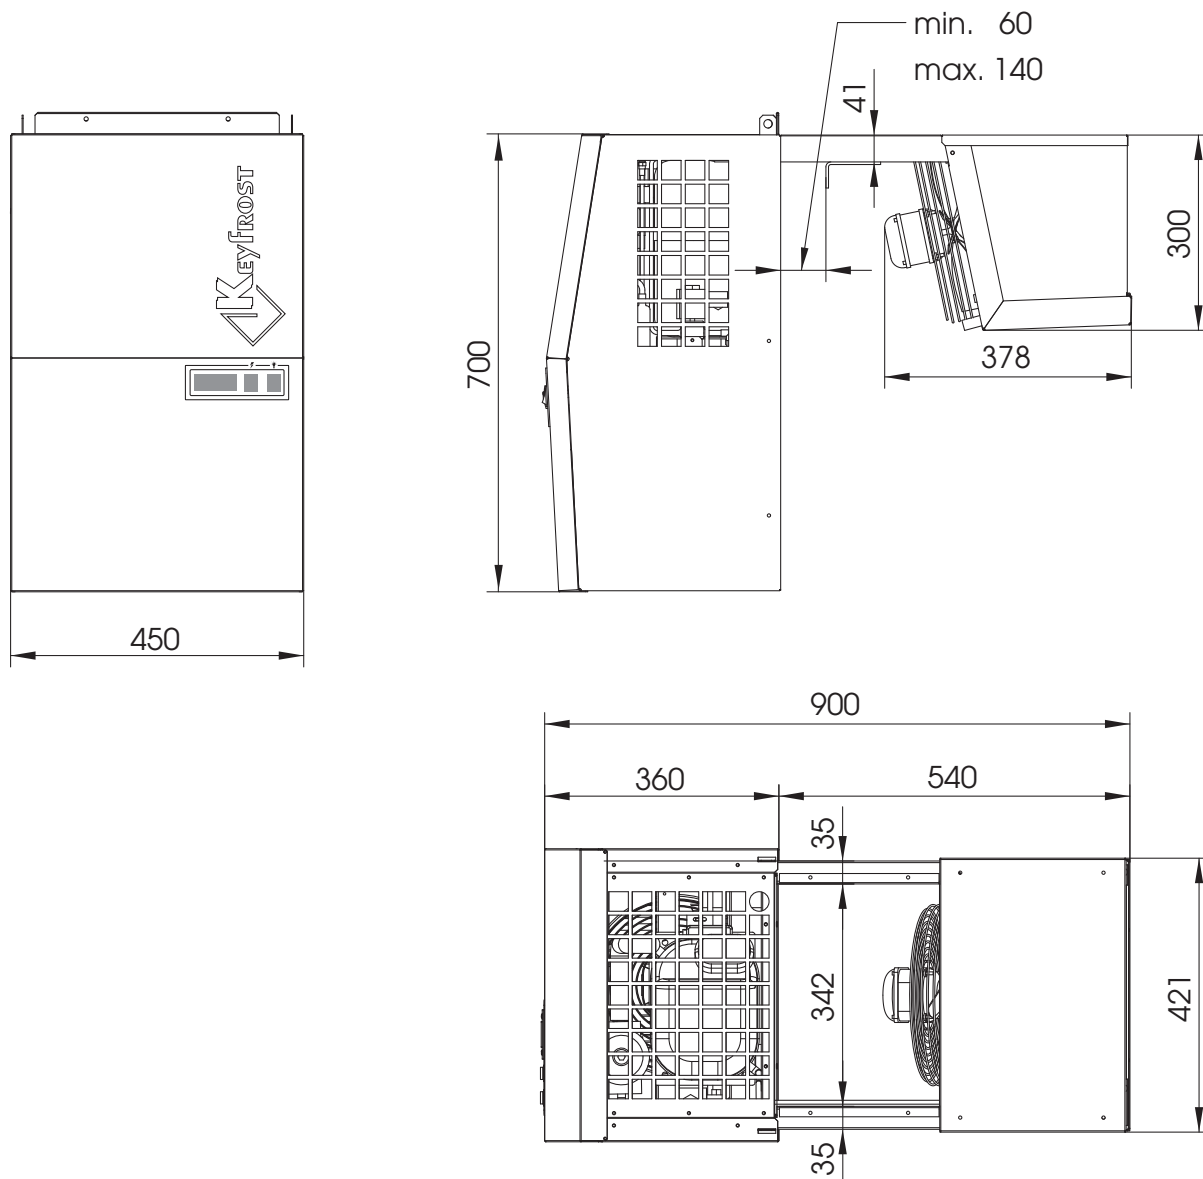

**KBA**

RESA - CAPACITY - PUISSANCE - LEISTUNG - RENDIMIENTO / VOLUME - VOLUME - VOLUME - VOLUMEN - VOLUMEN

		-20			
		27	32	38	43
<b>KBA 10 BT E M</b>	<b>P [W]</b>	833	790	691	630
	<b>V [m3]</b>	9.13	7.08	4.65	3.33
<b>KBA 13 BT E M</b>	<b>P [W]</b>	946	883	839	801
	<b>V [m3]</b>	11.08	8.37	6.23	4.83