

# FEATURES

- Environmentally friendly
- Low service costs
- Long life
- 100 mm insulation
- Accessories including baskets - see page 64



51 XLE

| XLE |

**OPTIMAL LOW  
ENERGY SOLUTION**



11 XLE




21 XLE



31 XLE



41 XLE

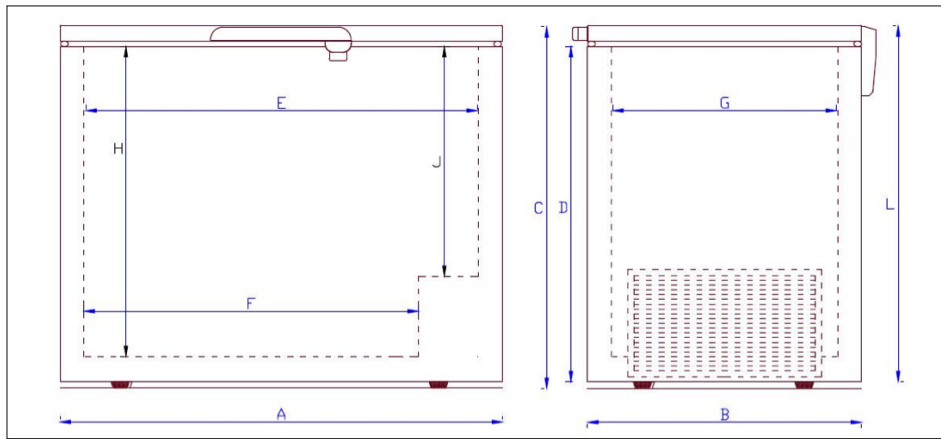

100 MM INSULATION

	XLE 11	XLE 21	XLE 31	XLE 41	XLE 51
Ambient temperature range	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30
Gross volume, litres	130	226	300	360	416
Net volume, litres	130	226	300	360	416
Temperature range inside unit	-16 to -22	-16 to -22	-16 to -22	-16 to -22	-16 to -22
Refrigerant: R600	Yes	Yes	Yes	Yes	Yes
Input power (watt):	90	102	114	126	138
Energy consumption / 24 h (kwh) at 25 degree amb.	0,43	0,55	0,64	0,72	0,81
Energy rating:	A+	A+	A+	A+	A+
<b>DIMENSIONS</b>					
External dimensions (WxDxH)	725*655*865	1055*655*865	1305*655*865	1505*655*865	1705*655*865
Internal dimension (WxDxH)	520*450*650	850*450*650	1100*450*650	1300*450*650	1500*450*650
Dimension A	725	1055	1305	1505	1705
Dimension B	655	655	655	655	655
Dimension C	865	865	865	865	865
Dimension D	780	780	780	780	780
Dimension E	520	850	1100	1300	1500
Dimension F	320	650	900	1100	1300
Dimension G	450	450	450	450	450
Dimension H	650	650	650	650	650
Dimension J	400	400	400	400	400
Dimension L	850	850	850	850	850
Insulation (mm)	100	100	100	100	100
<b>ACCESSORIES</b>					
Dividers	Optional	Optional	Optional	Optional	Optional
Number of baskets included	1	2	3	4	4
Castors	Optional	Optional	Optional	Optional	Optional
Castors w. brakes	Optional	Optional	Optional	Optional	Optional
Freezing capacity kg /24 h	16	25	31	34	36
Calendar in lid	Incl.	Incl.	Incl.	Incl.	Incl.
Light in lid	Incl.	Incl.	Incl.	Incl.	Incl.
Lock	Incl.	Incl.	Incl.	Incl.	Incl.
Thermometer	Optional	Optional	Optional	Optional	Optional
<b>OTHER DATA</b>					
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Inner cabinet: option	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
Power 110volt / 60 hz	Optional	Optional	Optional	Optional	Optional
Thermostat	Analog	Analog	Analog	Analog	Analog
Net weight, kg	43	54	64	67	77
Gross weight, kg	46	58	68	71	82
<b>SHIPPING</b>					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	46	40
40' HC cont. Capacity	126	88	62	61	52
Standard Trailer capacity	102	74	60	52	44