


VSS-6-6-R
VSS-6-9-R
VSS-6-13-R
VSS-6-16-R
VSSB-6-6-R
VSSB-6-9-R
VSSB-6-13-R
VSSB-6-16-R




Disponible acabados de la carta NCS o RAL, incluidos en el precio estándar, excepto alto brillo y metalizados.

Available finish included in NCS or RAL color chart, at the same price, except glossy and metallic finishing



VSS
+2°C +8°C



VSSB
+14°C 17°C
55% HR

mod.	largo length (mm)	fondo depth (mm)	alto height (mm)	exposición display (m²)	puertas corredera sliding doors (uds)	puertas abatibles hinged doors (uds)	potencia frig. frig. power (W)	consumo consumption (W)	rango range	refrigerante refrigerant
VSS-6-6	600	730	1380	0,54	0	1	817	1067	+2°C+8°C	R-452A
VSS-6-9	950	730	1380	0,9	2	0	1096	1366	+2°C+8°C	R-452A
VSS-6-13	1300	730	1380	1,26	2	0	1096	1739	+2°C+8°C	R-452A
VSS-6-16	1650	730	1380	1,62	2	0	1497	1963	+2°C+8°C	R-452A
VSSB-6-6	600	730	1380	0,54	0	1	815	1067	+14°C+17°C	R-452A
VSSB-6-9	950	730	1380	0,9	2	0	1096	1366	+14°C+17°C	R-452A
VSSB-6-13	1300	730	1380	1,26	2	0	1096	1739	+14°C+17°C	R-452A
VSSB-6-18	1650	730	1380	1,62	2	0	1497	1963	+14°C+17°C	R-452A

Características técnicas y constructivas sujetas a variación sin previo aviso

VSS vitrina refrigerada para snack (+2°+8°)
VSSB vitrina refrigerada para chocolates (+14°+17°, 55% HR)

- Exterior fabricado en chapa de acero plastificada, lacada o inox
- Costados en ABS inyectado
- Interior en acero inoxidable AISI-304 18/10.
- **Cristal doble templado:** frontal, laterales, encimera y puertas
- Perfilera en aluminio anodizado
- Estantes de cristal, con iluminación LED 6500 K
- Opción LED 3000 K (luz cálida) o ROSA, al mismo precio
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Evaporador ventilado
- Descarche automático con evaporación automática
- Condensación ventilada
- Control electrónico de temperatura
- Indicador de temperatura
- Clase climática 3 (25°C 60%)

Todos los modelos se pueden personalizar en decoración
 Cualquier decoración incluida en el precio, excepto alto brillo y metalizado


We reserve the right to change specifications without prior notice

VSS snacks refrigerated (+2°+8°)
VSSB chocolate refrigerated (+14°+17°, 55% HR)


- External finish in plastic coated steel, lacquered or stainless steel
- Sides in ABS injected
- Internal finish in AISI-304 18/10 stainless steel
- **Tempered double glazed:** front, sides, worktop and doors
- Anodised aluminium profiles
- Glass shelves, with 6500 K LED lighting
- Optional 3000 K LED (soft light) or PINK, same price
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Ventilated evaporator
- Auto defrost and automatic evaporation
- Ventilated condensation
- Electronic temperature controller
- External thermometer
- Climate class 3 (25°C 60%)

All models can be customized in decoration
 All decorations are included on price, except glossy or melic finishing

230v 60Hz / 115v 60Hz consultar - consult

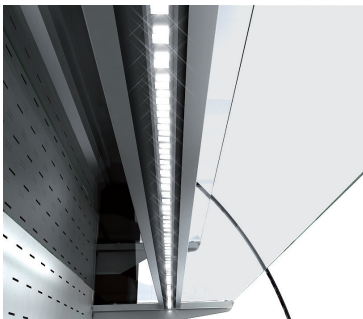

LED estantes
Shelves LED lighting

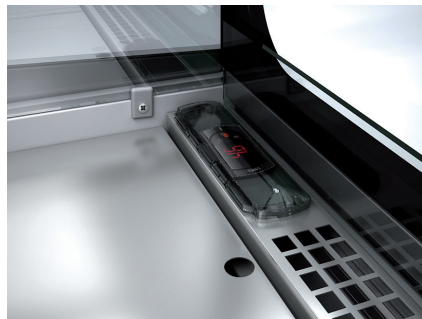

Centralita digital protegida
Electronic control protected




Unión cristales
Glass panels join

all photos must be considered as a reference - fotografías no contractuales



VSS-6-9-R

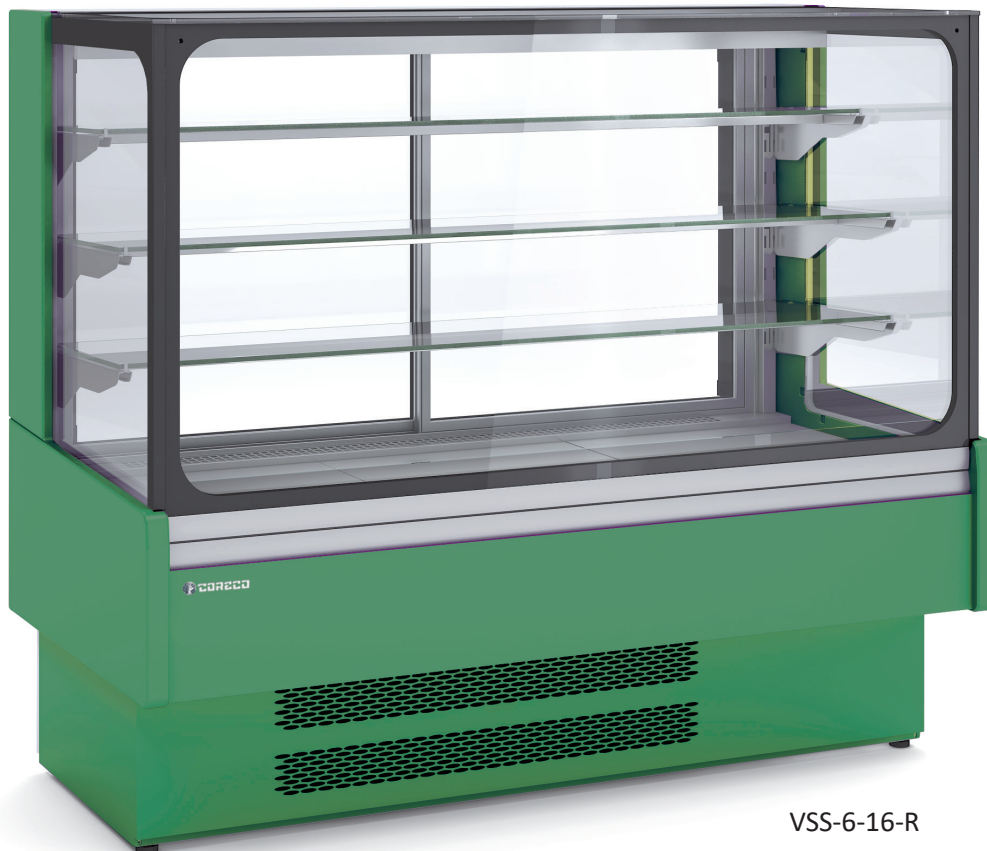

VSS-6-16-R